



Distributor

Advantages

EQUIPMENT



Modern factory building
advanced machine equipment

INSPECTION SYSTEM



Mature inspection system,professional
engineers,advanced inspection instruments

SERVICE TEAM



Experienced and professional service
team,mastering multiple languages

SALES NET



JAMA brand agents and distributors cover
more than 50 countries and regions around
the world

OEM EXPERIENCE



Offer technical support and product
application for various famous equi-
pment manufacturer

INVENTORY SYSTEM



More than 8000 m² warehouse,thousands
of product categories stock

COMPANY CULTURE



Unity and harmonious,hard-working
and rigorous teamwork,be faithful and
responsible for partners

ENTERPRISE PROSPECT



To be an international influential bearing
brand and valuable corporate citizen, to
achieve employees and partners

Contents

Type Of Insert Ball Bearing Units01

Pillow Blocks

Gcr15 Bearing With Cast Iron Housing

UCP200 Series04

UCP300 UCF200 Series06

UCF300 UCFL200 Series08

UCFL300 UCT200 Series10

UCT300 UCFC200 UCC200 Series12

UCPH200 UCPA200 Series13

UCPW200 UCPG200 Series14

UCFB200 UCFA200 Series.....15

SBLF200 SALF200 Series16

SBFW200 SBFD200 Series.....16

UCHA200 UCHE200 Series.....17

Pressed Steel Housing PF200 PFT200 PFL200 Series18

Pressed Steel Housing PP200 Series.....19

Pressed steel housing with Nitrile rubber19

Zinc Alloy Pillow Blocks

UP000 UFL000 Series.....20

KP000 KFL000 Series.....21

Insert Ball Bearings

UC200 UC300 Series22

NA200 SA200 CSA200 Series.....24

SB200 CSB200 UD200(SC200) Series25

UK200+H2300 Series.....26

SER200 Series.....27

Agricultural Bearings28

Plummer Blocks

SN500 Series38

SNU500 Series39

SN600 Series40

SNU600 Series41

Adapter Sleeves.....42

Housing Series45

Types Of Insert Ball Bearing Units

	1. Pillow block This is the most basic unit for easy shaft mounting. Pillow block can withstand load from all directions for normal duty service in all types of power transmission and general machinery.
	2. UCPH2, NAPH2, UKPH2+H High center height pillow block It is one type of pillow blocks with a higher center height.
	3. UCPA2, NAPA2, UKPA2+H UCPA2A UCPG2, UCPW2 PA200, PA200A, PG200, PW200. Tapped-base pillow block It has compact structure, saving mounting space. It can be fitted with bolts from the underneath of the base.
	4. UCF2, NAF2, UKF2+H, SAF2G UCFX, SBF2G UCF3, NAF3, UKF3+H Square flange unit These bearing units are designed to fix at the sides of the machine which are vertical to the center of the shafts by means of 4 bolts. The mounting method is widely used in the machines. Square piloted flange units UCF3, NAF3, UKF3+H This unit is best used in situation where accurate alignment is required.
	5. UCFC2, NAFC2, UKFC2-II Round flange cartridge unit These bearing units are installed in the holes on the side of the places where concentricity demanded.


Types Of Insert Ball Bearing Units

	6. UCFL2, NAFL2, UKFL2+H, SBFL2G UCFL3, NAFL3, UKFL3+H, UCFLX, SAFL2G SBLF2, SALF2, SBFW2, SBFD2 Oval flange unit This type of housing is useful in saving space and weight. It can be installed by means of two bolts. The set bolt pitch is the same as that of the square flange type.
	7. UCFB2 Flange bracket unit This type has three bolt holes on only one side of the flange. This type of bearing unit is used where the mounting space is limited, and the housing can be fixed on only one side.
	8. UCFA2 Adjustable flange unit This type has two bolt holes with one side adjustable, enabling distance from center of shaft to be varied.
	9. UCT2, NAT2 UCST2 Take up unit This unit is movable along a guide on the side hole of the housing. This type is applied to the machines in which the center of main shaft need free alignment.
	10. UCC2 Cartridge unit This precision made housing outside diameter is used where control of axial direction is important.

Types Of Insert Ball Bearing Units

	11. Hanger unit UHA2 UCHE2 This unit is used in screw conveyors and in situations where compact installation or where middle of the shaft support is needed.
	12. Pressed housing pillow block SAPP2、SBPP2 This housing is made of stamped steel for light weight. This type is applied to the machine of whose rotating speed is low or medium, or the machine with light load. The insert ball bearing for the pressed housing are usually SA or SB series.
	13. Pressed housing round flange unit SAPP2、SBPF2 This housing is made of stamped steel for light weight. This type is applied to the machine of whose rotating speed is low or medium, or the machine with light load. The insert ball bearing for the pressed housing are usually SA or SB series.
	14. Pressed housing flange unit SAPFT2、SBPFT2 This housing is made of stamped steel for light weight. It can be used where the mounting space is limited. This type is applied to the machine of whose rotating speed is low or medium, or the machine with light load. The insert ball bearing for the press housing are usually SA or SB series.
	15. Pressed housing oval flange unit SAPFL2、SBPFL2 This housing is made of stamped steel for light weight. This type has only two blot holes. It needs much smaller mounting space.


Pillow Blocks

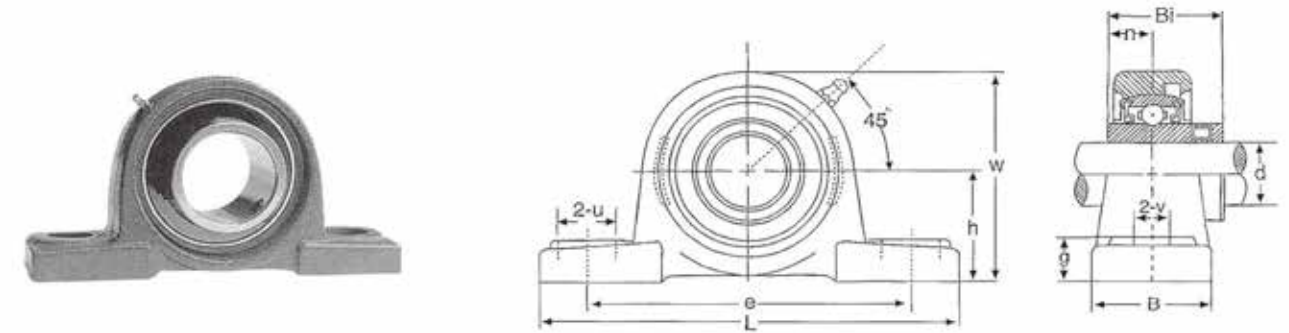

UCP200 Series

Unit No.	shaft		Dimensions(mm)										bolt size mm	weight kg
	d (in.)	(mm)	h	L	e	B	v	u	g	w	Bi	n		
UCWP201 201-8	1/2	12	30.2	124	94	32	13	19	14	57	27.4	11.5	M10	0.66
UCWP202 202-10	5/8	15	30.2	124	94	32	13	19	14	57	27.4	11.5	M10	0.66
UCWP203 203-11	11/16	17	30.2	124	94	32	13	19	14	57	27.4	11.5	M10	0.66
UCP204-12 204	3/4	20	33.3	127	94	37	13	19	14	64	31.0	12.7	M10	0.70
UCP205-14 205-15 205	7/8	25	36.5	140	105	38	13	19	15	69.5	34.0	14.3	M10	0.76
UCP206-18 206	1-1/8	30	42.9	159	121	43	17	21	17	83	38.1	15.9	M12	1.25
UCP207-20 207-21 207-22 207	1-1/4	35	47.6	167	127	45	17	21	18	92	42.9	17.5	M12	1.55
UCP208-24 208-25 208	1-1/2	40	49.2	181	136	50	17	21	18	98	49.2	19.0	M12	1.90
UCP209-26 209-27 209-28 209	1-5/8	45	54	190	146	52	17	21	20	106	49.2	19.0	M12	2.20
UCP210-30 210-31 210	1-7/8	50	57.2	203	159	59	20	25	20	112	51.6	19.0	M16	2.75
UCP211-32 211-34 211	2	55	63.5	218	171	57	20	25	23	124	55.6	22.2	M16	3.30
UCP212-36 212 212-38 212-39	2-1/4	60	69.8	239	184	69	20	24	26	137	65.1	25.4	M16	4.70
UCP213-40 213	2-1/2	65	76.2	264	202	68	25	30	27	147	65.1	25.4	M20	5.60
UCP214-44 214	2-3/4	70	79.4	266	208	69	25	31	28	155	74.6	30.2	M20	6.60
UCP215 215-48	3	75	82.6	274	217	73	25	29	28	162	77.8	33.3	M20	7.30
UCP216		80	88.9	290	231	76	25	30	32	174	82.6	33.3	M20	9.00
UCP217-52 217	3-1/4	85	95.2	312	247	83	25	28	34	187	85.7	34.1	M20	10.80
UCP218-56 218	3-1/2	90	101.6	326	262	87	27	32	35	198	96.0	39.7	M22	13.00


Pillow Blocks

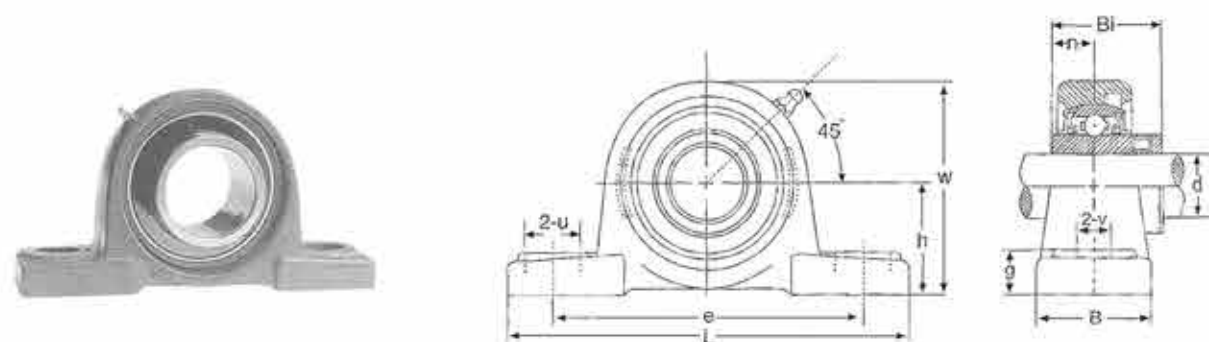

UCP300 Series

代号 Unit No.	shaft		Dimensions(mm)										bolt size mm	weight kg
	d		h	L	e	B	v	u	g	w	Bi	n		
	(in.)	(mm)												
UCP305-14 305-15 305 305-16	7/8 15/16 1	25	45	175	132	45	17	21	16	83	38	15	M14	1.40
UCP306-18 306 306-19	1-1/8 1-3/10	30	50	180	140	50	17	21	19	95	43	17	M14	1.80
UCP307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	56	211	160	56	17	25	21	106	48	19	M14	2.80
UCP308-24 308-25 308	1-1/2 1-9/16	40	60	220	168	60	17	27	24	114	52	19	M14	3.08
UCP309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	67	245	191	67	20	30	25	127	57	22	M16	4.10
UCP310-30 310-31 310	1-7/8 1-15/16	50	75	278	215	75	21	35	29	143	61	22	M16	6.00
UCP311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	80	310	236	80	21	38	30	153	66	25	M16	7.40
UCP312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	85	332	256	85	25	38	32	165	71	26	M20	9.40
UCP313-40 313	2-1/2	65	90	341	260	90	25	38	35	176	75	30	M20	10.00
UCP314-44 314	2-3/4	70	95	362	280	90	27	40	35	187	78	33	M22	12.00
UCP315 315-48	3	75	100	382	290	100	27	40	35	198	82	32	M22	14.00
UCP316		80	106	402	302	110	28	40	41	211	86	34	M22	18.00
UCP317-52 317	3-1/4	85	112	422	321	110	33	45	40	220	96	40	M27	20.00
UCP318-56 318	3-1/2	90	118	430	330	110	33	45	45	235	96	40	M27	24.00
UCP319 319-60	3-3/4	95	125	470	360	120	36	45	45	250	103	41	M30	29.00
UCP320 320-64	4	100	140	492	380	120	36	50	50	275	108	42	M30	35.00
UCP321		105	140	489	380	120	36	50	50	279	112	44	M30	39.00
UCP322		110	150	520	400	140	40	55	55	300	117	46	M33	45.00
UCP324		120	160	570	450	140	40	55	65	320	126	51	M33	55.00
UCP326		130	180	600	480	140	40	55	75	355	135	54	M33	72.00
UCP328		140	200	620	500	140	40	55	75	390	145	59	M33	89.00


Square Flange Unit

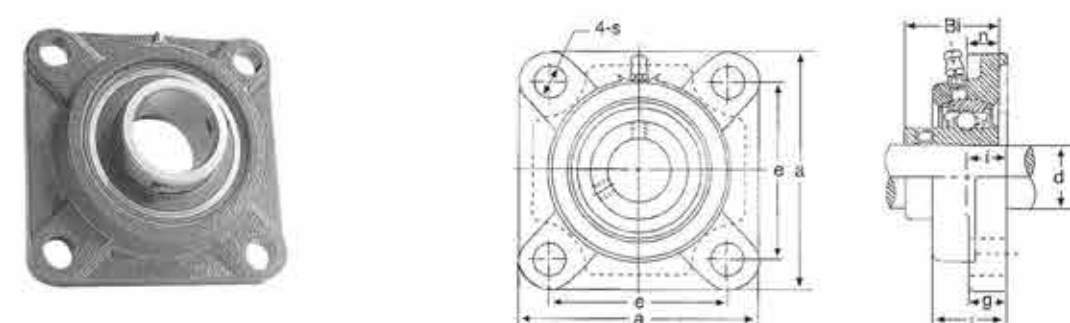

UCF200 Series

Unit No.	shaft		Dimensions(mm)								bolt size mm	weight kg
	d (in.)	(mm)	a	e	l	g	l	s	Bi	n		
UCWF201 201-8	1/2	12	76	54	15	11	25.5	12	27.4	11.5	M10	0.61
UCWF202 202-10	5/8	15	76	54	15	11	25.5	12	27.4	11.5	M10	0.61
UCWF203 203-11	11/16	17	76	54	15	11	25.5	12	27.4	11.5	M10	0.61
UCF204-12 204	3/4	20	86	64	15	11	25.5	12	31.0	12.7	M10	0.61
UCF205-14 205-15 205 205-16	7/8 15/16 1	25	95	70	16	13	27.0	12	34.1	14.3	M10	0.80
UCF206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	108	83	18	13	31.0	12	38.1	15.9	M10	1.00
UCF207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-3/8 1-7/16	35	117	92	19	15	34.0	14	42.9	17.5	M12	1.40
UCF208-24 208-25 208	1-1/2 1-9/16	40	130	102	21	15	36.0	16	49.2	19.0	M14	1.80
UCF209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	137	105	22	16	38.0	16	49.2	19.0	M14	2.20
UCF210-30 210-31 210	1-7/8 1-15/16	50	143	111	22	16	40.0	16	51.6	19.0	M14	2.40
UCF211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	162	130	25	18	43.0	19	55.6	22.2	M16	3.50
UCF212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	175	143	29	18	48.0	19	65.1	25.4	M16	4.20
UCF213-40 213	2-1/2	65	187	149	30	22	50.0	19	65.1	25.4	M16	5.30
UCF214-44 214	2-3/4	70	193	152	31	22	54.0	19	74.6	30.2	M16	5.90
UCF215-47 215 215-48	2-15/16 3	75	200	159	34	22	56.0	19	77.8	33.3	M16	6.30
UCF216		80	208	165	34	22	58.0	23	82.6	33.3	M20	7.30
UCF217-52 217	3-1/4	85	220	175	36	24	63.0	23	85.7	34.1	M20	8.90
UCF218-56 218	3-1/2	90	235	187	40	25	68.0	23	96.0	39.7	M20	11.60


Square Flange Unit

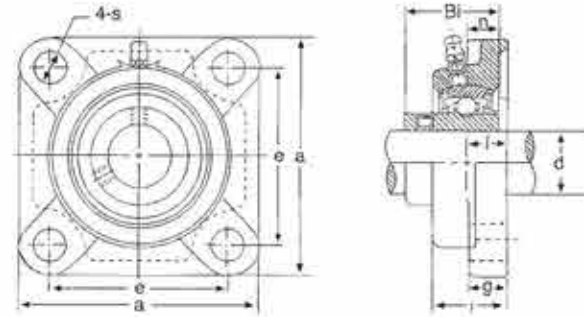

UCF300 Series

Unit No.	shaft d		基本尺寸 Dimensions(mm)								bolt size mm	weight kg
	(in.)	(mm)	a	e	i	g	l	s	Bi	n		
UCF305-14 305-15 305-16	7/8 15/16 1	25	110	80	16	13	29	16	38	15	M14	1.20
UCF306-18 306-19	1-1/8 1-3/16	30	125	95	18	15	32	16	43	17	M14	1.80
UCF307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8 1	35	135	100	20	16	36	19	48	19	M16	2.20
UCF308-24 308-25 308	1-1/2 1-9/16 1-1/2	40	150	112	23	17	40	19	52	19	M16	2.90
UCF309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4 1-3/4	45	160	125	25	18	44	19	57	22	M16	3.50
UCF310-30 310-31 310	1-7/8 1-15/16 1-7/8	50	175	132	28	19	48	23	61	22	M20	4.80
UCF311-32 311-34 311 311-35	2 2-1/8 2-1/8 2-3/16	55	185	140	30	20	52	23	66	25	M20	5.60
UCF312-36 312 312-38 312-39	2-1/4 2-1/4 2-3/8 2-7/16	60	195	150	33	22	56	23	71	26	M20	6.70
UCF313-40 313	2-1/2 2-1/2	65	208	166	33	22	58	23	75	30	M20	7.80
UCF314-44 314	2-3/4 2-3/4	70	226	178	36	25	61	25	78	33	M22	10.10
UCF315 315-48	3 3	75	236	184	39	25	66	25	82	32	M22	11.10
UCF316		80	250	196	38	27	68	31	86	34	M27	12.80
UCF317-52 317	3-1/8 3-1/8	85	260	204	44	27	74	31	96	40	M27	15.40
UCF318-56 318	3-1/2 3-1/2	90	280	216	44	30	76	35	96	40	M30	19.00
UCF319 319-60	3-3/4 3-3/4	95	290	228	59	30	94	35	103	41	M30	20.70
UCF320 320-64	4 4	100	310	242	59	32	94	38	108	42	M33	24.80
UCF321		105	310	242	59	32	94	38	112	44	M33	25.60
UCF322		110	340	266	60	35	96	41	117	46	M30	34.70
UCF324		120	370	290	65	40	110	41	126	51	M36	45.50
UCF326		130	410	320	65	45	115	41	135	54	M36	67.50
UCF328		140	450	350	75	55	125	41	145	59	M36	98.50


Oval flange Unit

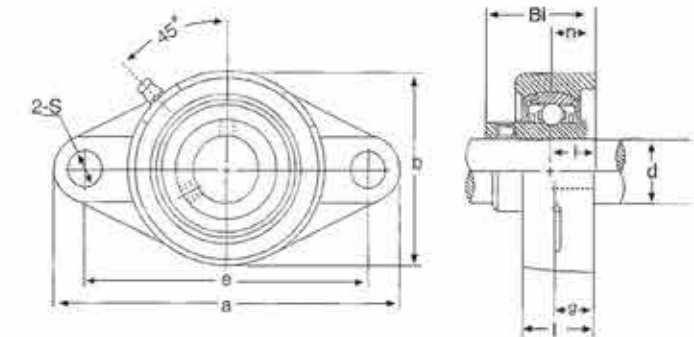

UCFL200 Series

Unit No.	shaft		Dimensions(mm)									bolt size mm	weight kg
	d	(mm)	a	e	l	g	l	s	b	Bi	n		
UCWFL201 201-8	1/2	12	99	76.5	15	11	25.5	11.5	57	30.9	11.5	M10	0.37
UCWFL202 202-10	5/8	15	99	76.5	15	11	25.5	11.5	57	30.9	11.5	M10	0.37
UCWFL203 203-11	11/16	17	99	76.5	15	11	25.5	11.5	57	30.9	11.5	M10	0.37
UCFL204-12 204	3/4	20	113	90	15	11	25.5	12	60	33.3	12.7	M10	0.45
UCFL205-14 205-15 205-16	7/8 15/16 1	25	130	99	16	13	27.0	16	68	35.7	14.3	M14	0.66
UCFL206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	148	117	18	13	31.0	16	80	40.2	15.9	M14	0.86
UCFL207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	161	130	19	15	34.0	16	90	44.1	17.5	M14	1.15
UCFL208-24 208-25 208	1-1/2 1-9/16	40	175	144	21	15	36.0	16	100	51.2	19.0	M14	1.46
UCFL209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	188	148	22	16	38.0	19	108	52.2	19.0	M16	1.85
UCFL210-30 210-31 210 210-32	1-7/8 1-15/16 2	50	197	157	22	16	40.0	19	115	54.6	19.0	M16	1.98
UCFL211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	224	184	25	18	43.0	19	130	58.4	22.2	M16	2.90
UCFL212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	250	202	29	18	48.0	23	140	68.7	25.4	M20	3.70
UCFL213-40 213	2-1/2	65	258	210	30	22	50.0	23	155	69.7	25.4	M20	4.76
UCFL214-44 214	2-3/4	70	265	216	31	22	54.0	23	160	75.4	30.2	M20	5.30
UCFL215-47 215 215-48	2-15/16 3	75	275	225	34	22	56.0	23	165	78.5	33.3	M20	5.85
UCFL216		80	290	233	34	22	58.0	25	180	83.3	33.3	M22	7.00
UCFL217-52 217	3-1/4	85	305	248	36	24	63.0	25	190	87.6	34.1	M22	9.80
UCFL218-56 218	3-1/2	90	320	265	40	24	68.0	25	205	96.3	39.7	M22	12.40


Oval Flange Unit

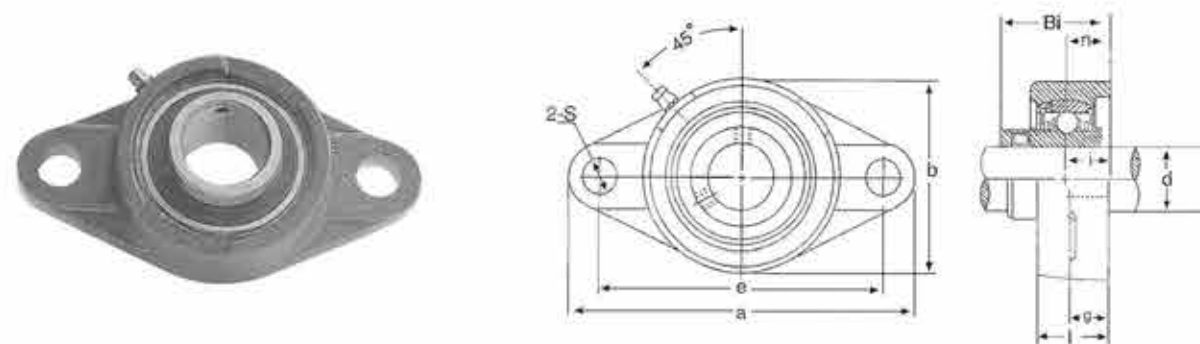

UCFL300 Series

Unit No.	shaft d		Dimensions(mm)									bolt size mm	weight kg
	(in.)	(mm)	a	e	i	g	l	s	b	Bi	n		
UCFL305-14 305-15 305 305-16	7/8 15/16 1	25	150	113	16	13	29	19	80	38	15	M16	1.10
UCFL306-18 306 306-19	1-1/8 1-3/16	30	180	134	18	15	32	23	90	43	17	M20	1.60
UCFL307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	185	141	20	16	36	23	100	48	19	M20	2.00
UCFL308-24 308-25 308	1-1/2 1-9/16	40	200	158	23	17	40	23	112	52	19	M20	2.60
UCFL309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	230	177	25	18	44	25	125	57	22	M22	3.63
UCFL310-30 310-31 310	1-7/8 1-15/16	50	240	187	28	19	48	25	140	61	22	M22	4.60
UCFL311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	250	198	30	20	52	25	150	66	25	M22	5.30
UCFL312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	270	212	33	22	56	31	160	71	26	M27	6.40
UCFL313-40 313	2-1/2	65	295	240	33	25	58	31	175	75	30	M27	8.20
UCFL314-44 314	2-3/4	70	315	250	36	28	61	35	185	78	33	M30	10.00
UCFL315 315-48	3	75	320	260	39	30	66	35	195	82	32	M30	11.00
UCFL316		80	355	285	38	32	68	38	210	86	34	M33	14.30
UCFL317		85	370	300	44	32	74	38	220	96	40	M33	16.20
UCFL318		90	385	315	44	36	76	38	235	96	40	M33	19.20
UCFL319		95	405	330	59	40	94	41	250	103	41	M36	21.80
UCFL320		100	440	360	59	40	94	44	270	108	42	M39	26.50
UCFL321		105	440	360	59	40	94	44	270	112	44	M39	29.50
UCFL322		110	470	390	60	42	96	44	300	117	46	M39	38.00
UCFL324		120	520	430	65	48	110	47	330	126	51	M42	43.67
UCFL326		130	550	460	65	50	115	47	360	135	54	M42	61.30
UCFL328		140	600	500	75	60	125	51	400	145	59	M42	90.00


Take-up Unit

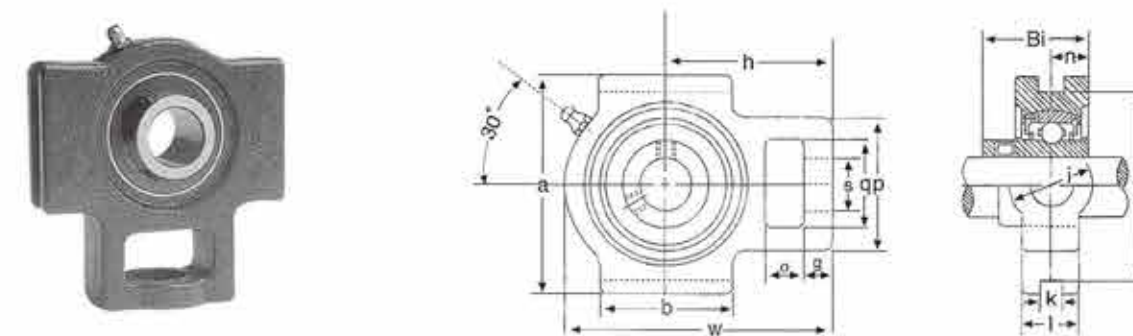

UCT200 Series

Unit No.	shaft		Dimensions(mm)															weight kg
	d																	
	(in.)	(mm)	o	g	p	q	s	b	k	e	a	w	i	l	h	Bi	n	
UCWT201 201-8	1/2	12	15	9	46	31	18	46	12	70	82	88	82	21	58	27.4	11.5	0.72
UCWT202 202-10	5/8	15	15	9	46	31	18	46	12	70	82	88	82	21	58	27.4	11.5	0.72
UCWT203 203-11	11/16	17	15	9	46	31	18	46	12	70	82	88	82	21	58	27.4	11.5	0.72
UCT204-12- 204	3/4	20	16	10	51	32	19	51	12	76	89	94	82	21	61	31	12.7	0.72
UCT205-14 205-15 205 205-16	7/8 15/16 1	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34.1	14.3	0.80
UCT206-18 206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	15.9	1.26
UCT207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	17.5	1.68
UCT208-24 208-25 208	1-1/2 1-9/16	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49.2	19.0	2.28
UCT209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19.0	2.52
UCT210-30 210-31 210	1-7/8 1-15/16	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51.6	19.0	2.75
UCT211-32 211-34 211 211-35	2 2-1/8 2-3/16	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55.6	22.2	4.10
UCT212-36 212 212-38 212-39	2-1/4 2-3/8 2-7/16	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65.1	25.4	4.90
UCT213-40 213	2-1/2	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65.1	25.4	6.70
UCT214-44 214	2-3/4	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74.6	30.2	6.90
UCT215 215-48	3	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	33.3	7.40
UCT216		80	32	21	111	70	41	121	26	165	184	235	70	51	140	82.6	33.3	8.10
UCT217-52 217	3-1/4	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1	11.00
UCT218-56 218	3-1/2	90	40	30	130	80	48	160	30	190	215	275	80	55	170	96.3	39.7	15.00


Take-up Unit

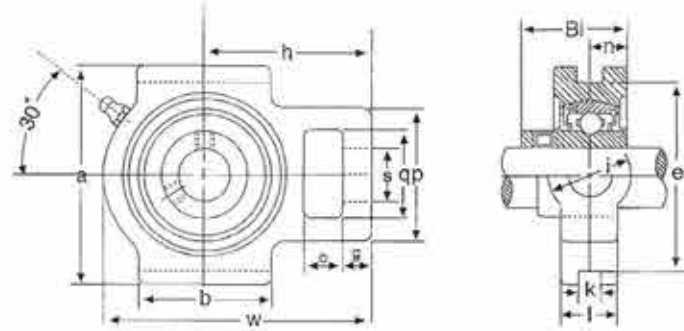

UCT300 Series


Unit No.	shaft d (mm)	Dimensions (mm)															weight kg
		a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	
UCT305-14 305-15 305 305-16	7/8 15/16 1	25	16	12	62	36	26	65	12	80	89	122	36	26	76	38	1.41
UCT306-18 306 306-19	1-1/8 1-3/16	30	18	14	70	41	28	74	16	90	100	137	41	28	85	43	1.85
UCT307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	20	15	75	45	30	80	16	100	110	150	45	32	94	48	2.45
UCT308-24 308-25 308	1-1/2 1-9/16	40	22	17	83	50	32	89	18	112	124	162	50	34	100	52	3.09
UCT309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	24	18	90	55	34	97	18	125	138	178	55	38	110	57	4.08
UCT310-30 310-31 310	1-7/8 1-15/16	50	27	20	98	61	37	106	20	140	151	191	61	40	117	61	5.25
UCT311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	29	21	105	66	39	115	22	150	163	207	66	44	127	66	6.41
UCT312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	31	23	113	71	41	123	22	160	178	220	71	46	135	71	7.61
UCT313-40 313	2-1/2	65	32	25	116	70	43	134	26	170	190	238	80	50	146	75	9.22
UCT314-44 314	2-3/4	70	36	25	130	85	46	140	26	180	202	252	90	52	155	78	11.40
UCT315 315-48	3	75	36	25	132	85	46	150	26	192	216	262	90	55	160	82	12.90
UCT316		80	42	28	150	98	53	160	30	204	230	282	102	60	174	86	15.65
UCT317-52 317	3-1/4	85	42	30	152	98	53	170	32	214	240	298	102	64	183	96	19.34
UCT318-56 318	3-1/2	90	46	30	160	106	57	175	32	228	255	312	110	66	192	96	21.25
UCT319 319-60	3-3/4	95	46	31	165	106	57	180	35	240	270	322	110	72	197	103	24.40
UCT320 320-64	4	100	48	32	175	115	59	200	35	260	290	345	120	75	210	108	30.60
UCT321		105	48	32	175	115	59	200	35	260	290	345	120	75	210	112	32.00
UCT322		110	52	38	185	125	65	215	38	285	320	385	130	80	235	117	39.00
UCT324		120	60	42	210	140	70	230	45	320	355	432	140	90	267	126	56.00
UCT326		130	65	45	220	150	75	240	50	350	385	465	150	100	285	135	69.00
UCT328		140	70	50	230	160	80	255	50	380	415	515	155	100	315	145	86.50

Round Flange Cartridge Unit/Cylindrical Cartridge Unit

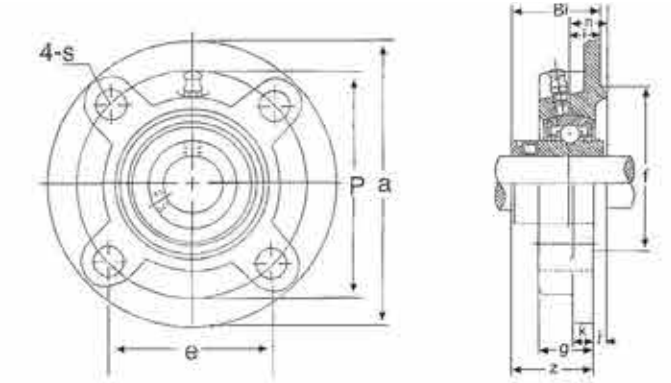

UCFC200 Series


Unit No.	shaft d(mm)	Dimensions(mm)													bolt size mm	weight kg
		a	p	e	i	s	j	k	g	f	z	Bl	n			
UCWFC201	12	90	70	49.5	9	10	4	7	19.5	55	28.3	27.4	11.5	M8	0.64	
UCWFC202	15	90	70	49.5	9	10	4	7	19.5	55	28.3	27.4	11.5	M8	0.60	
UCWFC203	17	90	70	49.5	9	10	4	7	19.5	55	28.3	27.4	11.5	M8	0.58	
UCFC204	20	100	78	55.1	10	12	5	7	20.5	62	28.3	31.0	12.7	M10	0.75	
UCFC205	25	115	90	63.6	10	12	6	7	21	70	28.7	34.1	14.3	M10	1.00	
UCFC206	30	125	100	70.7	10	12	8	8	23	80	32.2	38.1	15.9	M10	1.30	
UCFC207	35	135	110	77.8	11	14	8	9	26	90	36.4	42.9	17.5	M12	1.75	
UCFC208	40	145	120	84.8	11	14	10	9	26	100	41.2	49.2	19.0	M12	2.00	
UCFC209	45	160	132	93.3	10	16	12	14	26	105	40.2	49.2	19.0	M14	2.50	
UCFC210	50	165	138	97.6	10	16	12	14	28	110	42.6	51.6	19.0	M14	2.95	
UCFC211	55	185	150	106.1	13		12	15	31	125	46.4	55.6	22.2	M16	4.00	
UCFC212	60	195	160	113.1	17	19	12	15	36	135	56.7	65.1	25.4	M16	4.90	
UCFC213	65	205	170	120.2	16	19	14	15	36	145	56.7	65.1	25.4	M16	5.35	
UCFC214	70	215	177	125.1	17	19	14	18	40	150	61.4	74.6	30.2	M16	6.90	
UCFC215	75	220	184	130.1	18	19	16	18	40	160	62.5	77.8	33.3	M16	7.50	
UCFC216	80	240	200	141.4	18	23	16	18	42	170	67.3	82.6	33.3	M20	8.70	
UCFC217	85	250	208	147.1	18	23	18	20	45	180	69.6	85.7	34.1	M20	10.30	
UCFC218	90	265	220	155.5	22	23	18	20	50	190	78.3	96.0	39.7	M20	13.50	

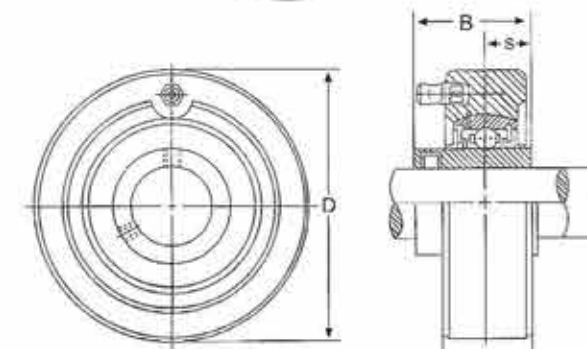

UCC200 Series

Unit No.	shaft d(mm)	Dimensions(mm)				weight kg
		D	A	B	S	
UCWC201	12	67	20	27.4	11.5	0.56
UCWC202	15	67	20	27.4	11.5	0.52
UCWC203	17	67	20	27.4	11.5	0.51
UCC204	20	72	20	31.0	12.7	0.49
UCC205	25	80	22	34.0	14.3	0.65
UCC206	30	85	27	38.1	15.9	0.82
UCC207	35	90	28	42.9	17.5	0.93
UCC208	40	100	30	49.2	19.0	1.25
UCC209	45	110	31	49.2	19.0	1.53
UCC210	50	120	33	51.6	19.0	1.93
UCC211	55	125	35	55.6	22.2	2.14
UCC212	60	130	38	65.1	25.4	2.52
UCC213	65	140	40	65.1	25.4	2.97


Pillow Blocks

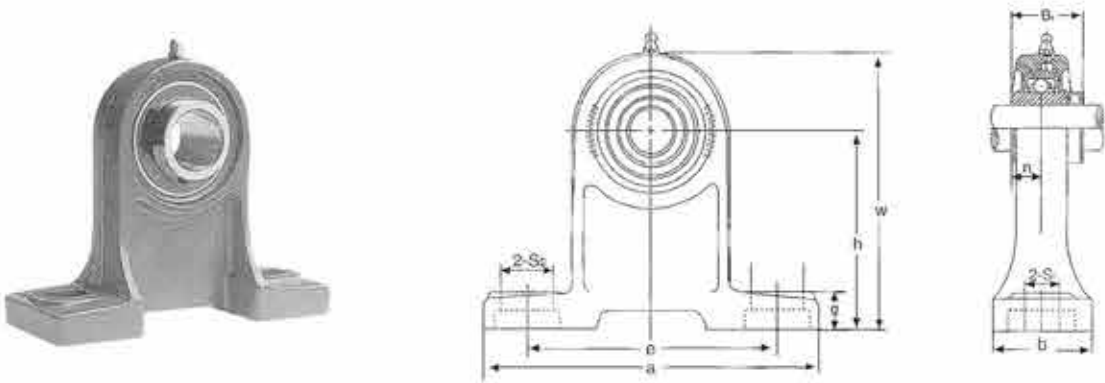

UCPH200 Series

Unit No.	shaft d(mm)	Dimensions(mm)										bolt size mm	weight kg
		h	a	e	b	S ₁	S ₂	g	w	Bi	n		
UCPH202	15	70	127	95	40	13	19	15	100	27.4	11.5	M 10	0.96
UCPH203	17	70	127	95	40	13	19	15	100	27.4	11.5	M 10	0.96
UCPH204	20	70	127	95	40	13	19	15	101	31.0	12.7	M 10	0.96
UCPH205	25	80	140	105	50	13	19	16	114	34.1	14.3	M 10	1.20
UCPH206	30	90	165	121	50	17	21	18	130	38.1	15.9	M 14	1.60
UCPH207	35	95	167	127	60	17	21	19	140	42.9	17.5	M 14	2.00
UCPH208	40	100	184	137	70	17	25	19	149	49.2	19.0	M 14	2.70
UCPH209	45	105	190	147	70	17	24	21	159	49.2	19.0	M 14	3.00
UCPH210	50	110	207	158	70	20	25	22	166	51.6	19.0	M 16	3.50
UCPH211	55	120	219	171	75	20	25	23	181	55.6	22.2	M 16	5.47
UCPH212	60	130	235	186	85	20	25	24	197	65.1	25.4	M 16	6.31

Pillow Blocks

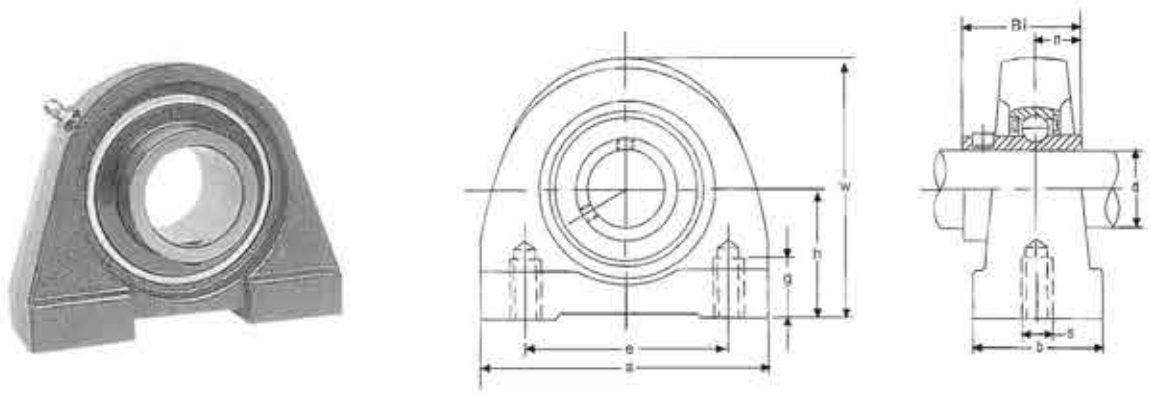

UCPW200 Series

Unit No.	shaft d(mm)	Dimensions(mm)								bolt size mm	weight kg
		h	a	e	b	g	w	Bi	n		
UCPW201	12	33.3	65	50.8	32	13	64	31.0	12.7	M8	0.8
UCPW202	15	33.3	65	50.8	32	13	64	31.0	12.7	M8	0.79
UCPW203	17	33.3	65	50.8	32	13	64	31.0	12.7	M8	0.77
UCPW204	20	33.3	65	50.8	32	13	64	31.0	12.7	M8	0.76
UCPW205	25	36.5	70	50.8	36	13	70	34.0	14.3	M10	0.91
UCPW206	30	42.9	98	76.2	38	16	82	38.1	15.9	M10	1.42
UCPW207	35	47.6	103	82.6	45	19	93	42.9	17.5	M12	1.91
UCPW208	40	49.2	116	88.9	47	19	99	49.2	19.0	M12	2.28
UCPW209	45	53.9	120	95.3	48	19	107	49.2	19.0	M12	2.61
UCPW210	50	57.2	135	101.6	54	22	115	51.6	19.0	M16	3.28


UCPA200 Series

带座轴承 代号 Unit No.	shaft d(mm)	Dimensions(mm)									bolt size mm	weight kg
		h	a	e	b	G	g	w	Bi	s		
UCWPA201	12	30.2	70	48	36	12	11	57	27.4	11.5	M10	0.67
UCWPA202	15	30.2	70	48	36	12	11	57	27.4	11.5	M10	0.63
UCWPA203	17	30.2	70	48	36	13	11	57	27.4	11.5	M10	0.62
UCPA204	20	30.2	75	52	39	13	12	62	31.0	12.7	M10	0.60
UCPA205	25	36.5	84	56	38	15	14	72	34.1	14.3	M10	0.81
UCPA206	30	42.9	94	66	50	18	13	84	38.1	15.9	M14	1.20
UCPA207	35	47.6	110	80	48	20	13	95	42.9	17.5	M14	1.70
UCPA208	40	49.2	116	84	60	20	13	100	49.2	19.0	M14	1.90
UCPA209	45	54.2	120	90	61	25	14	108	49.2	19.0	M14	2.20
UCPA210	50	57.2	132	94	66	25	15	116	51.6	19.0	M16	2.60
UCPA211	55	63.5	140	104	67	25	15	125	55.6	22.2	M16	3.00
UCPA212	60	69.9	150	114	68	25	16	138	65.1	25.4	M16	4.24
UCPA213	65	76.2	160	124	70	25	16	150	65.1	25.4	M16	6.23


UCPG200 Series

Unit No.	shaft d(mm)	Dimensions(mm)								bolt size mm	weight kg
		h	a	e	b	g	w	Bi	n		
UCPG201	12	33.3	70	49	38	14	64	31.0	12.7	M8	0.80
UCPG202	15	33.3	70	49	38	14	64	31.0	12.7	M8	0.79
UCPG203	17	33.3	70	49	38	14	64	31.0	12.7	M8	0.77
UCPG204	20	33.3	70	49	38	14	64	31.0	12.7	M8	0.76
UCPG205	25	36.5	75	50	38	15	70	34.0	14.3	M10	0.91
UCPG206	30	42.9	85	60	48	17	83	38.1	15.9	M10	1.42
UCPG207	35	47.6	100	68	48	20	93	42.9	17.5	M12	1.91
UCPG208	40	49.2	110	78	54	20	98	49.2	19.0	M12	2.28
UCPG209	45	53.9	120	85	54	20	106	49.2	19.0	M12	2.61
UCPG210	50	57.2	135	95	60	21	114	51.6	19.0	M16	3.28

Flange Bracket Unit/Adjustable Flange Unit

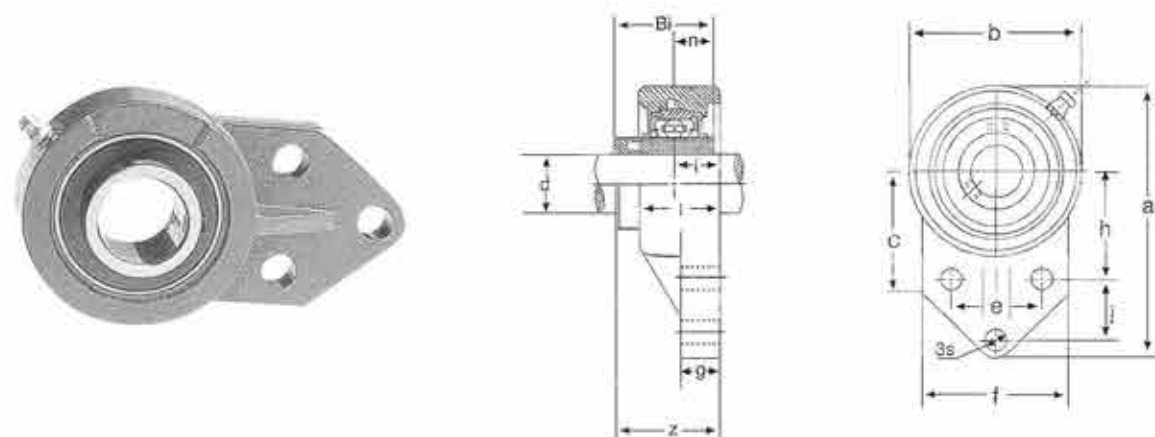


Hanger Unit

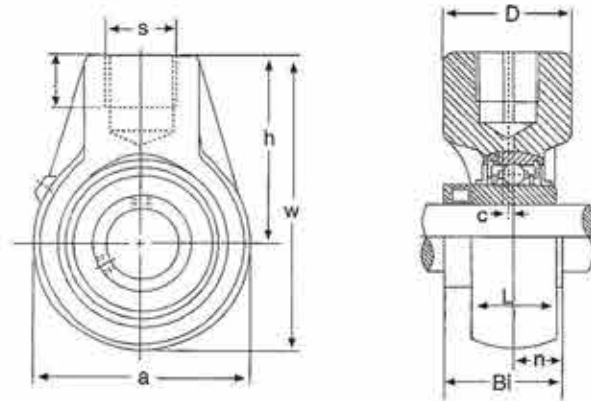

UCHA200 Series


Unit No.	shaft d(mm)	Dimensions(mm)										weight kg
		a	w	h	D	S(in)	j	Bi	n	c	L	
UCHA204	20	64	96	64	40	G3/4	19	31.0	12.7	0	21	0.70
UCHA205	25	70	103	64	40	G3/4	19	34.0	14.3	0	24	0.74
UCHA206	30	78	103	64	40	G3/4	19	38.1	15.9	0	28	0.91
UCHA207	35	92	116	70	40	G3/4	19	42.9	17.5	0	30	1.19
UCHA208	40	96	121	73	40	G3/4	19	49.2	19.0	2	33	1.36
UCHA209	45	108	136	82	48	G1	21	49.2	19.0	4	35	1.78
UCHA210	50	118	142	83	48	G1	21	51.6	19.0	5	37	1.93
UCHA211	55	126	150	87	60	G5/4	25	55.6	22.2	7	38	3.50
UCHA212	60	142	173	102	60	G5/4	28	65.1	25.4	9	42	3.90
UCHA213	65	166	200	117	70	G5/4	32	65.1	25.4	9.5	44	5.90

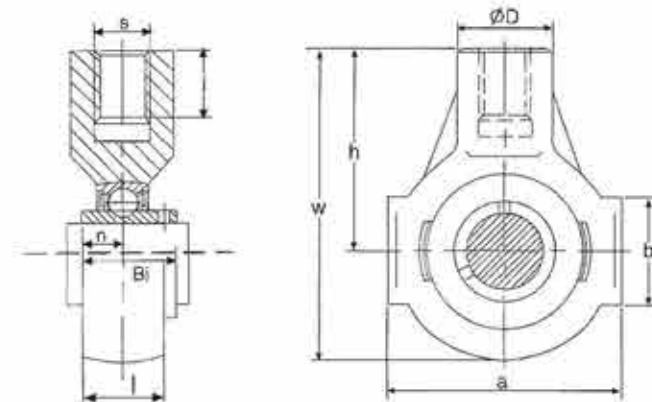

UCHE200 Series



Unit No.	shaft (d:mm)	Dimensions(mm)									bolt size mm	weight kg
		a	w	h	D	j	Bi	n	l	b		
UCHE201	12	65	91	58	30	21	31.0	12.7	25	38	M16	0.61
UCHE202	15	65	91	58	30	21	31.0	12.7	25	38	M16	0.61
UCHE203	17	65	91	58	30	21	31.0	12.7	25	38	M16	0.61
UCHE204	20	65	91	58	30	21	31.0	12.7	25	38	M16	0.61
UCHE205	25	70	99	64	35	22	34.0	14.3	28	38	M20	0.79
UCHE206	30	85	114	72	40	24	38.1	15.9	32	40	M24	1.23
UCHE207	35	90	122	76	40	24	42.9	17.5	32	48	M24	1.44
UCHE208	40	100	135	85	40	24	49.2	19.0	36	45	M24	1.82
UCHE209	45	110	145	90	40	24	49.2	19.0	40	46	M24	2.05
UCHE210	50	110	145	90	40	24	51.6	19.0	40	46	M24	2.13

Pressed Steel Housing

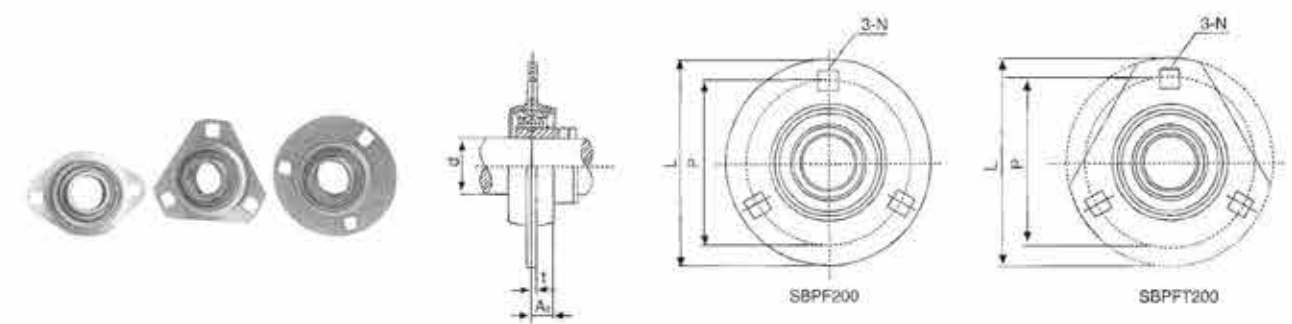


PF200, PFT200 Series

Housing No.	Dimensions(mm)							bolt size (mm)	Bearing No.	weight kg
	d	L	P	A ₁	t	N				
PF PFT	201	12	81	63.5	7.0	2.0	7.0	M6	SA SB	201 0.14
	202	15	81	63.5	7.0	2.0	7.0	M6		202 0.14
	203	17	81	63.5	7.0	2.0	7.0	M6		203 0.14
	204	20	90	71.0	9.0	2.0	9.0	M8		204 0.14
	205	25	95	76.0	9.0	2.0	9.0	M8		205 0.17
	206	30	113	90.0	11.0	2.5	11.0	M10		206 0.20
	207	35	122	100.0	11.0	2.5	11.0	M10		207 0.30
	208	40	148	119.0	11.5	3.5	13.5	M12		208 0.34
	209	45	150	120.5	11.5	3.5	13.5	M12		209 0.64
	210	50	157	127.0	12.5	4.0	13.5	M12		210
	211	55	168	138.0	13.0	4.0	13.5	M12		211
	212	60	177	148.0	14.0	4.0	13.5	M12		212

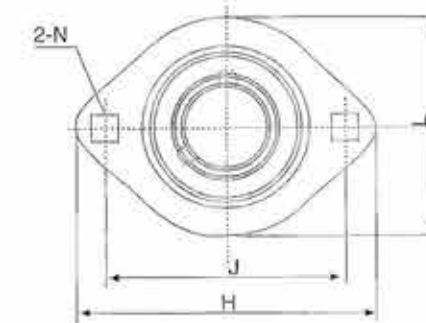

•SBPFL200




•SAPFL200

PFL200 Series


座代号 Housing No.	Dimensions(mm)							bolt size (mm)	Bearing No.	weight kg
	d	H	J	A ₁	L	N	t			
PFL201	12	81	63.5	7.0	59	7.0	2.0	M6	SA SB	201 0.09
PFL202	15	81	63.5	7.0	59	7.0	2.0	M6		202 0.09
PFL203	17	81	63.5	7.0	59	7.0	2.0	M6		203 0.09
PFL204	20	90	71.5	7.0	67	7.0	2.0	M8		204 0.10
PFL205	25	95	76.0	9.0	71	9.0	2.0	M8		205 0.12
PFL206	30	113	90.5	11.0	84	11.0	2.5	M10		206 0.18
PFL207	35	122	100.0	11.0	94	11.0	2.5	M10		207 0.20
PFL208	40	148	119.0	13.5	106	13.5	3.5	M12		208 0.25

Zinc Alloy Pillow Blocks

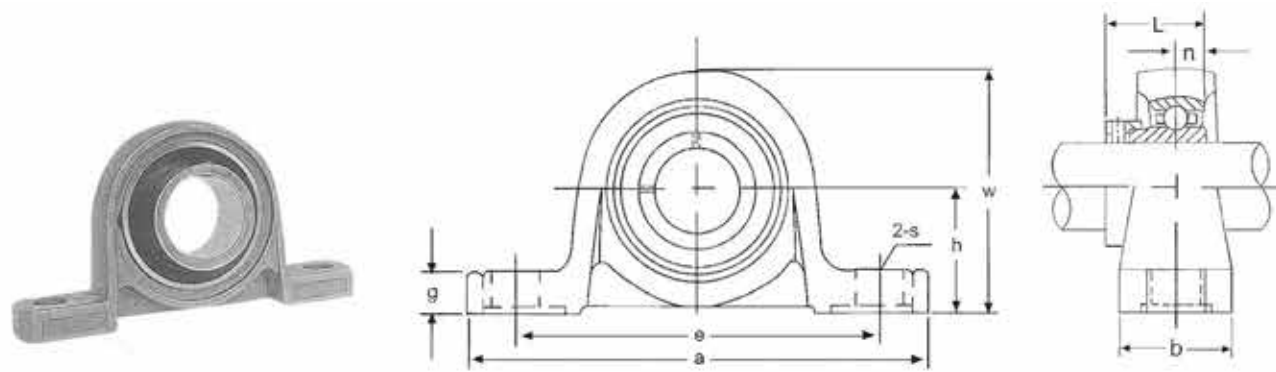

KP000 Series Pillow Block
Extra Narrow Width - Set Screw Locking


Unit No.	shaft d(mm)	Dimensions(mm)									bolt size mm	Bearing No.	Housing No.	weight kg
		h	a	e	b	s	g	W	Bi	n				
KP000	10	18	67	53	16	7	6	35	14	4.0	M6	K000	P000	0.08
KP001	12	19	71	56	16	7	6	38	14.5	4.0	M6	K001	P001	0.10
KP002	15	22	80	63	16	7	7	43	16.5	4.5	M6	K002	P002	0.14
KP003	17	24	85	67	18	7	7	47	17.5	5.0	M6	K003	P003	0.17
KP004	20	28	100	80	20	10	9	55	21.0	6.0	M8	K004	P004	0.25
KP005	25	32	112	90	20	10	10	62	22.5	6.0	M8	K005	P005	0.33
KP006	30	36	132	106	26	13	11	70	24.5	6.5	M10	K006	P006	0.50

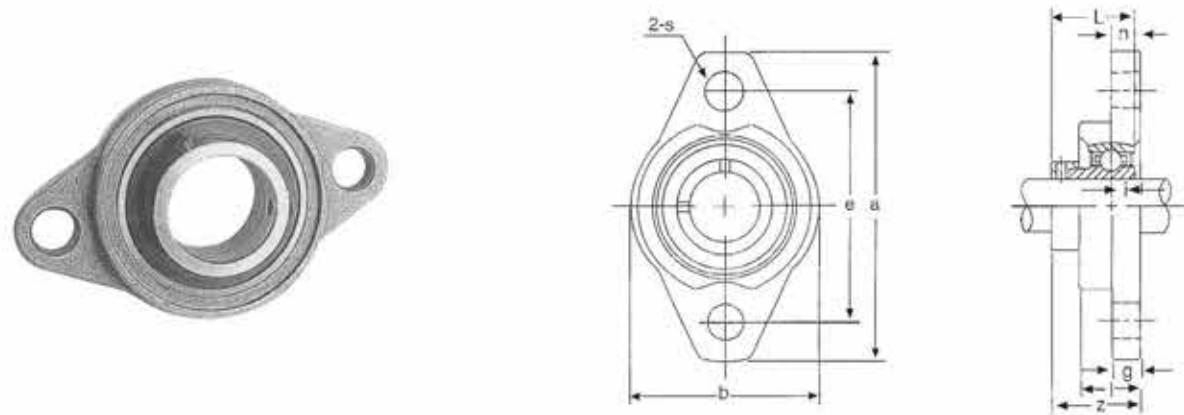

KFL000 Series Two-bolt Flange Unit
Extra Narrow Width - Set Screw Locking

Unit No.	shaft d(mm)	Dimensions(mm)										bolt size mm	Bearing No.	Housing No.	weight kg
		a	e	i	g	l	s	b	Z	L	n				
KFL000	10	60	45	5.5	5.5	11.5	7	36	15.5	14.0	4.0	M6	K000	FL000	0.07
KFL001	12	63	48	5.5	5.5	11.5	7	38	16.0	14.5	4.0	M6	K001	FL001	0.08
KFL002	15	67	53	6.5	6.5	13.0	7	42	18.6	16.5	4.5	M6	K002	FL002	0.11
KFL003	17	71	56	7.0	7.0	14.0	7	46	19.5	17.5	5.0	M6	K003	FL003	0.14
KFL004	20	90	71	8.0	8.0	16.0	10	55	23.0	21.0	6.0	M8	K004	FL004	0.23
KFL005	25	95	75	8.0	8.0	16.0	10	60	24.5	22.5	6.0	M8	K005	FL005	0.27
KFL006	30	112	85	9.0	9.0	18.0	13	70	27.0	24.5	6.5	M10	K006	FL006	0.39


Insert Ball Bearings

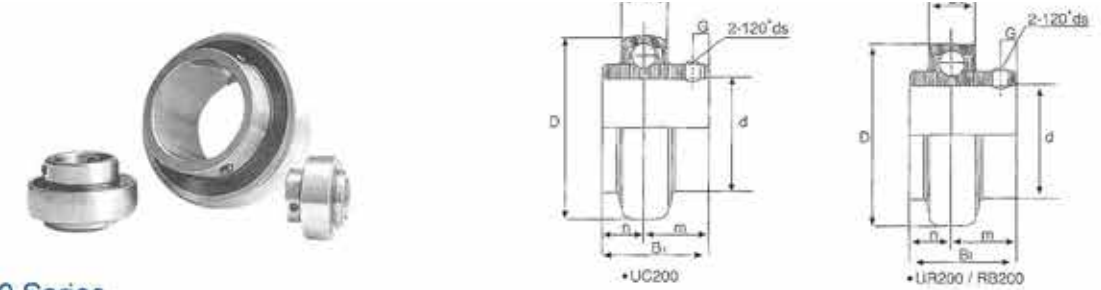

UC200 Series

Bearing No.	shaft		Dimensions(mm)								Basic dynamic Load ratings (kN)		Basic static Load ratings (kN)		weight (kg)
	d		D	Bi	Be	n	m	G	ds						
	(in.)	(mm)							(mm)	(in./UNF)					
UCW201		12	40	27.4	14	11.5	15.9	4.5	M5x0.8		7.36	4.79	0.12		
UCW201-8	1/2									1/4-28					
UCW202		15							M5x0.8						
UCW202-9	9/16		40	27.4	14	11.5	15.9	4.5		1/4-28	7.36	4.79	0.11		
UCW202-10	5/8									1/4-28					
UCW203		17							M5x0.8						
UCW203-11	11/16		40	27.4	14	11.5	15.9	4.5		1/4-28	7.36	4.79	0.10		
UC201		12	47	31.0	17	12.7	18.3	5	M6x1		9.88	6.65	0.21		
UC201-8	1/2									1/4-28					
UC202															
UC202-9	9/16	15	47	31.0	17	12.7	18.3	5	M6x1	1/4-28	9.88	6.65	0.19		
UC202-10	5/8									1/4-28					
UC203									M6x1						
UC203-11	11/16	17	47	31.0	17	12.7	18.3	5		1/4-28	9.88	6.65	0.19		
UC204		20											0.17		
204-12	3/4		47	31.0	17	12.7	18.3	5	M6x1	1/4-28	9.88	6.65	0.18		
UC205		25									7.36	4.79	0.19		
205-14	7/8		52	34.1	17	14.3	19.8	5	M6x1	1/4-28	10.78	9.93	0.22		
205-15	15/16												0.20		
205-16	1												0.19		
UC206		30											0.31		
206-17	1-1/16														
206-18	1-1/8		62	38.1	19	15.9	22.2	5	M6x1	1/4-28	14.97	11.31	0.34		
206-19	1-3/16												0.32		
206-20	1-1/4												0.30		
UC207		35											0.46		
UC207-20	1-1/4		72	42.9	20	17.5	25.4	7	M8x1	5/16-24	19.75	15.30	0.52		
207-21	15/16														
207-22	1-3/8												0.48		
207-23	1-7/16												0.46		
UC208		40											0.63		
208-24	1-1/2		80	49.2	21	19.0	30.2	8	M8x1	5/16-24	25.09	19.84	0.68		
208-25	1-9/16												0.64		
UC209		45											0.68		
209-26	1-5/8		85	49.2	22	19.0	30.2	8	M8x1	5/16-24	25.14	20.46	0.78		
209-27	1-11/16												0.74		
209-28	1-3/4												0.70		
UC210		50											0.78		
210-30	1-7/8		90	51.6	24	19.0	32.6	10	M10x1.25	3/8-24	26.98	23.18	0.85		
210-31	1-15/16												0.80		
UC211		55											1.07		
211-32	2		100	55.6	25	22.2	33.4	10	M10x1.25	3/8-24	33.37	29.22	1.22		
211-34	2-1/8												1.10		
211-35	2-3/16												1.05		
UC212		60											1.51		
212-36	2-1/4		110	65.1	27	25.4	39.7	10	M10x1.25	3/8-24	36.74	32.93	1.65		
212-38	2-3/8														
212-39	2-7/16												1.42		
UC213		65											1.86		
213-39	2-7/16		120	65.1	29	25.4	39.7	10	M10x1.25	3/8-24	44.01	40.00	1.96		
213-40	2-1/2												1.94		
UC214		70											2.05		
214-43	2-11/16		125	74.6	30	30.2	44.4	12	M12x1.25	7/16-20	46.79	45.03	2.04		
214-44	2-3/4												2.06		
UC215		75											2.21		
215-47	2-15/16		130	77.6	30	33.3	44.5	12	M12x1.25	7/16-20	50.85	49.30	2.30		
215-48	3												2.13		
UC216		80	140	82.6	33	33.3	49.3	12	M12x1.25	7/16-20	55.04	53.31	2.79		
UC217		85											3.38		
217-52	3-1/4		150	85.7	35	34.1	51.6	12	M12x1.5	7/16-20	63.98	63.89	3.59		
UC218		90											4.46		
218-56	3-1/2		160	96.0	37	39.7	56.3	12	M12x1.5	1/2-20	73.83	70.76	4.56		



Insert Ball Bearings

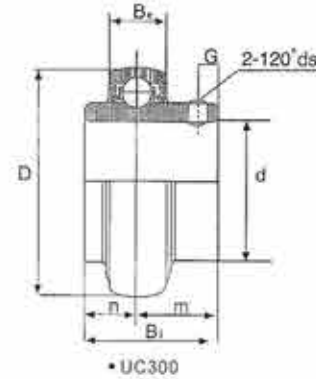

UC300 Series

Bearing No.	shaft		Dimensions(mm)							Basic Load Rating (KN)		weight (kg)
	d (in.)	d (mm)	D	B1	Be	n	m	G	ds	Dynamic C	Static Co	
UC305-14 305-15 305 305-16	7/8 15/16 1	25	62	38	21	15	23	6	M6X0.75	2170	1090	0.44
UC306-18 306 306-19	1-1/8 1-3/16	30	72	43	23	17	26	6	M6X0.75	2730	1420	0.56
UC307-20 307-21 307-22 307	1-1/4 1-5/16 1-3/8	35	80	48	25	19	29	8	M8X1	3400	1820	0.71
UC308-24 308-25 308	1-1/2 1-9/16	40	90	52	27	19	33	10	M10X1.25	4150	2270	1.00
UC309-26 309-27 309-28 309	1-5/8 1-11/16 1-3/4	45	100	57	30	22	35	10	M10X1.25	5250	3050	1.28
UC310-30 310-31 310	1-7/8 1-15/16	50	110	61	32	22	39	12	M12X1.5	6300	3650	1.65
UC311-32 311-34 311 311-35	2 2-1/8 2-3/16	55	120	66	34	25	41	12	M12X1.5	7300	4250	2.07
UC312-36 312 312-38 312-39	2-1/4 2-3/8 2-7/16	60	130	71	36	26	45	12	M12X1.5	8300	4900	2.59
UC313-40 313	2-1/2	65	140	75	38	30	45	12	M12X1.5	9450	5650	3.15
UC314-44 314	2-3/4	70	150	78	40	33	45	12	M12X1.5	10600	6450	3.83
UC315 315-48	3	75	160	82	42	32	50	14	M14X1.5	11600	7200	4.59
UC316		80	170	86	44	34	52	14	M14X1.5	12500	8150	5.40
UC317-52 317	3-1/4	85	180	96	46	40	56	16	M16X1.5	13500	9100	6.58
UC318-56 318	3-1/2	90	190	96	48	40	56	16	M16X1.5	14600	10100	7.34
UC319 319-60	3-3/4	95	200	103	50	41	62	16	M16X1.5	15600	11100	8.70
UC320 320-64	4	100	215	108	54	42	66	18	M18X1.5	17700	13300	10.80
UC321		105	225	112	56	44	68	18	M18X1.5	18700	14500	12.20
UC322		110	240	117	60	46	71	18	M18X1.5	20900	17000	14.30
UC324		120	260	126	64	51	75	18	M18X1.5	21100	17000	18.50
UC326		130	280	135	68	54	81	20	M20X1.5	23400	19600	23.00
UC328		140	300	145	73	59	86	20	M20X1.5	26000	22400	28.50

Insert Ball Bearings

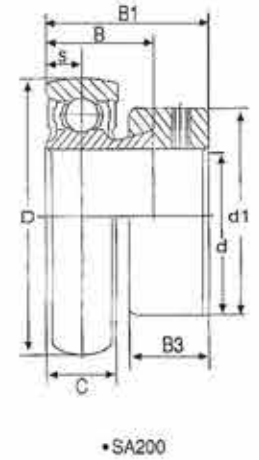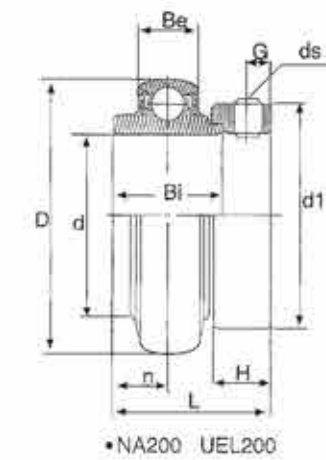


NA200 Series

轴承代号 Bearing No.	shaft		Dimensions(mm)								Basic dynamic Load ratings (KN)	Basic static Load ratings (KN)	weight (kg)
	d (in.)	d (mm)	D	Be	L	B1	n	d1	H	G	ds (mm)		
NA204	20	47	17	43.6	34.2	17.1	33.3	13.5	5.00	M6X1	9.88	6.65	0.21
NA205	25	52	17	44.4	34.0	17.5	38.1	13.5	5.00	M6X1	10.78	9.93	0.25
NA206	30	62	19	48.4	36.6	18.3	44.5	15.9	5.00	M6X1	14.97	11.31	0.39
NA207	35	72	20	51.2	37.8	18.8	55.0	17.5	6.50	M8X1	19.75	15.30	0.60
NA208	40	80	21	56.4	42.8	21.4	60.3	18.3	6.50	M8X1	25.09	19.84	0.77
NA209	45	85	22	56.4	42.8	21.4	63.5	18.3	6.50	M8X1	25.14	20.46	0.84
NA210	50	90	24	62.7	49.2	24.6	69.9	18.3	6.50	M8X1	26.98	23.18	1.02
NA211	55	100	25	71.4	55.6	27.80	76.2	20.7	8.00	M10X1.25	33.37	29.22	1.37
NA212	60	110	27	77.8	61.2	31.00	84.1	22.3	6.00	M10X1.25	36.74	32.93	1.85

SA200, CSA200 Series

Bearing No.	shaft		Dimensions(mm)							Eccentric Collar	Basic dynamic Load ratings (KN)	Basic static Load ratings (KN)	weight (kg)
	d (in.)	d (mm)	D	B	B1	S	C	B3	d1				
SA203 CSA203-11	11/16	17	40	19.10	28.6	7	14	13.5	28.6	A203 203-11	7.35	4.78	0.13
SA204-12 CSA204	3/4	20	47	20	29.6	7	14	13.5	33.3	A204-12 204	9.88	6.65	0.15
SA205-14 CSA205-15 SA205 SA205-16	7/8 15/16 1	25	52	21	30.5	7.5	15	13.5	38.1	A205-14 205-15 205 205-16	10.78	7.88	0.22
SA206-18 CSA206 206-19 206-20	1-1/8 1-3/16 1-1/4	30	62	22	33.9	8	16	15.9	44.5	A206-18 206 206-19 206-20	14.97	11.20	0.30
SA207-20 CSA207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	72	24	37.5	8	18	17.5	55.6	A207-20 207-21 207-22 207 207-23	19.75	15.20	0.50
SA208-24 CSA208-25 208	1-1/2 1-9/16	40	80	27	40.5	9.5	19	18.3	60.3	A208-24 208-25 208	22.8	18.20	0.67

Insert Ball Bearings

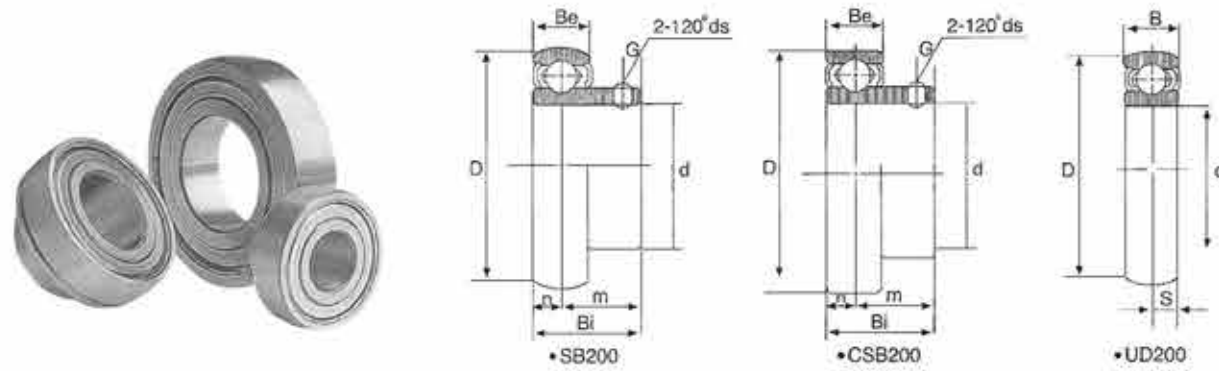

SB200, CSB200 Series


Bearing No.	shaft		Dimensions(mm)								Basic dynamic Load ratings (kN)	Basic static Load ratings (kN)	weight (kg)
	d		D	Bi	Be	n	m	G	ds				
	(in.)	(mm)							(mm)	(in.unf)			
SB CSB 203		17	40	22	12	6.0	16.0	4.5	M5x0.8		7.36	4.79	0.07
SB CSB 204 204-12	3/4	20	47	25	14	7.0	18.0	5.0	M6x1	1/4-28	9.88	6.65	0.12 0.13
SB CSB 205 205-14 205-15 205-16	7/8 15/16 1	25	52	27	15	7.5	19.5	5.0	M6x1	1/4-28	10.78	9.93	0.16 0.18 0.17 0.16
SB CSB 206 206-18 206-19 206-20	1-1/16 1-3/16 1-1/4	30	62	30	16	8.0	22.0	6.0	M6x1	1/4-28	14.97	11.31	0.25 0.26 0.25 0.24
SB CSB 207 207-20 207-22 207-23	1-1/4 1-3/8 1-7/16	35	72	32	17	8.5	23.5	7.0	M6x1	1/4-28	19.75	15.30	0.38 0.43 0.38 0.37
SB CSB 208 208-24 208-25	1-1/2 1-9/16	40	80	34	18	9.0	25.0	8.0	M8x1	5/16-24	25.09	19.64	0.58 0.60 0.58



UD200 Series

Bearing No.	Dimensions(mm)					Basic dynamic Load ratings (kN)	Basic static Load ratings (kN)	weight (kg)
	d	D	B	S	r			
UD203	17	40	12	6.0	1.0	7.36	4.79	0.06
UD204	20	47	14	7.0	1.5	9.88	6.65	0.10
UD205	25	52	15	7.5	1.5	10.78	9.93	0.12
UD206	30	62	16	8.0	1.5	14.97	11.31	0.19
UD207	35	72	17	8.5	2.0	19.75	15.30	0.27
UD208	40	80	18	9.0	2.0	25.09	19.84	0.37
UD209	45	85	19	9.5	2.0	25.14	20.46	0.42
UD210	50	90	20	10.0	2.0	26.98	23.18	0.47


Insert Ball Bearings

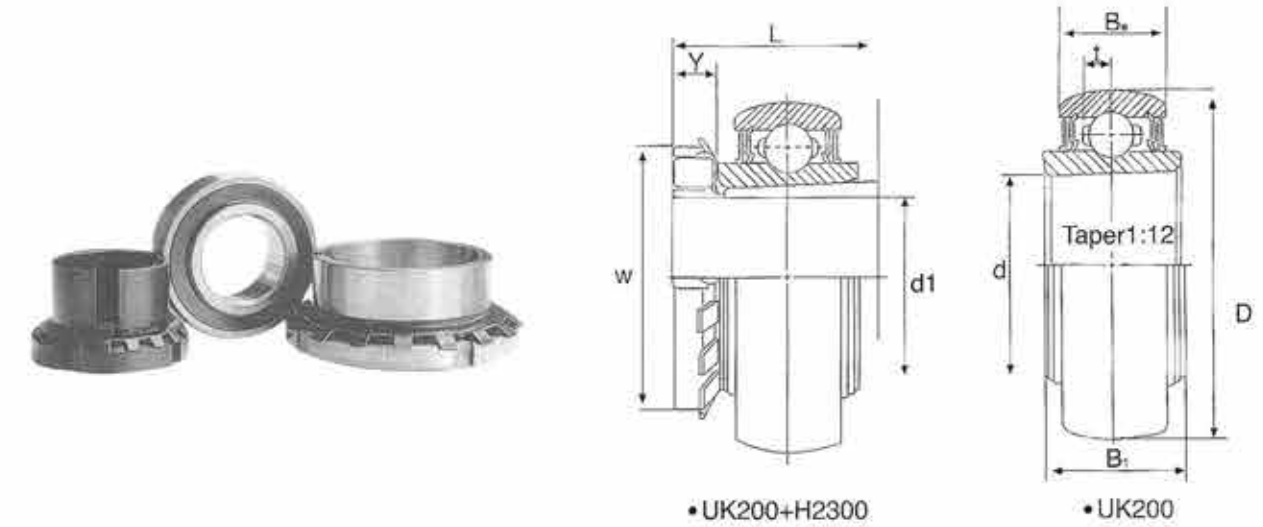

UK200+H2300 Series

Bearing No.	shaft		Dimensions(mm)								Basic dynamic Load ratings (kN)	Basic static Load ratings (kN)	Bearing No.	Adapter sleeve No.	weight (kg)
	d		d	D	Be	B1	L	t	r	w					
	(in.)	(mm)													
UK205+H2305 205+HE2305	3/4	20	25	52	17	23	35	4.5	8	38	10.78	9.93	UK205	H2305 HE2305	0.24 0.25
UK206+H2306 206+HA2306 206+HE2306	15/16 1	25	30	62	19	26	38	5.1	8	45	14.97	11.31	UK206	H2306 HA2306 HE2306	0.40 0.41 0.37
UK207+H2307 207+HS2307 207+HA2307	1-1/16 1-3/16	30	35	72	20	28	43	5.8	9	52	19.75	15.30	UK207	H2307 HS2307 HA2307	0.56 0.57 0.55
UK208+H2308 208+HE2308	1-1/4	35	40	80	21	29	46	6.2	10	58	25.09	19.84	UK208	H2308 HE2308	0.72 0.78
UK209+H2309 209+HA2309 209+HE2309	1-7/16 1-1/2	40	45	85	22	30	50	6.5	11	65	25.14	20.46	UK209	H2309 HA2309 HE2309	0.93 0.89 0.95
UK210+H2310 210+HA2310 210+HE2310	1-11/16 1-3/4	45	50	90	22	32	55	6.5	12	70	26.98	23.18	UK210	H2310 HA2310 HE2310	0.80 0.89 0.84
UK211+H2311 211+HS2311 211+HE2311	1-7/8 2	50	55	100	25	36	59	7.3	12	75	33.37	29.22	UK211	H2311 HS2311 HE2311	1.19 1.28 1.17
UK212+H2312 212+HS2312	2-1/8	55	60	110	27	38	62	7.7	13	80	36.74	32.93	UK212	H2312 HS2312	1.52 1.56
UK213+H2313 213+HA2313 213+HE2313	2-3/16 2-1/4	60	65	120	29	40	65	8.3	14	85	44.01	40.0	UK213	H2313 HA2313 HE2313	1.91 2.10 2.04
UK215+H2315 215+HE2315	2-1/2	65	75	130	30	43	73	9.2	15	98	50.85	49.30	UK215	H2315 HE2315	2.56 2.65
UK216+H2316 216+HE2316	2-3/4	70	80	140	33	46	78	9.6	17	105	55.04	53.31	UK216	H2316 HE2316	3.23 3.24
UK217+H2317 217+HE2317	3	75	85	150	35	48	82	10.5	18	110	63.98	63.69	UK217	H2317 HE2317	3.93 3.84
UK218+H2318 218+HS2318	3-1/8	80	90	160	37	50	86	11.1	18	120	73.83	70.76	UK218	H2318 HS2318	4.75 4.80



Insert Ball Bearings

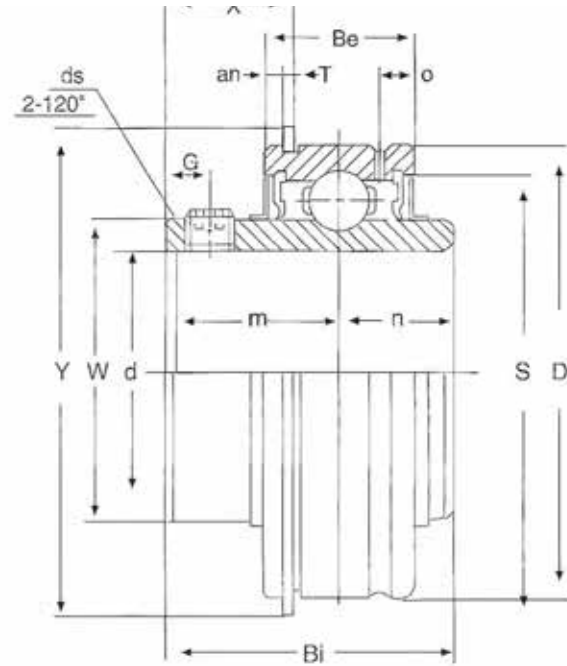

SER200 Series


Bearing No.	Dimensions (mm)															Basic Load Rating (KN)		weight (kg)
	d	D	Bi	Be	n	m	G	ds	o	W	an	T	Y (Max.)	X	S	Dynamic C	Static Co	
SER 201	12	47	31	15.9	10.3	20.7	4.5	M6X1	3.8	29	2.38	1.07	52.7	16.15	41	1310	630	0.27
SER 201-8	1/2	1.8504	1 1/32	5/8	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	0.636	1.614	2890	1390	0.27
SER 202	15	47	31	15.9	10.3	20.7	4.5	M6X1	3.8	29	2.38	1.07	52.7	16.15	41	1310	630	0.25
SER 202-9	5/8	1.8504	1 1/32	5/8	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	0.636	1.614	2890	1390	0.25
SER 202-10	5/8	1.8504	1 1/32	5/8	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	0.636	1.614	2890	1390	0.25
SER 203	17	47	31	15.9	10.3	20.7	4.5	M6X1	3.8	29	2.38	1.07	52.7	16.15	41	1310	630	0.23
SER 203-11	1 1/16	1.8504	1 1/32	5/8	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	0.636	1.614	2890	1390	0.24
SER 204	20	47	31	15.9	10.3	20.7	4.5	M6X1	3.8	29	2.38	1.07	52.7	16.15	41	1310	630	0.22
SER 204-12	3/4	1.8504	1 1/32	5/8	13/32	13/16	0.177	1/4-28	0.150	1.142	3/32	0.042	2.075	0.636	1.614	2890	1390	0.22
SER 205	25	52	34.9	19	13.1	21.8	5	M6X1	5.2	34	2.38	1.07	57.9	15.75	46	1430	710	0.28
SER 205-14	1 1/8	2.0472	1 3/8	3/4	33/64	55/64	0.197	1/4-28	13/64	1.339	3/32	0.042	2.280	0.620	1.811	3150	1560	0.27
SER 205-15	1 1/8	2.0472	1 3/8	3/4	33/64	55/64	0.197	1/4-28	13/64	1.339	3/32	0.042	2.280	0.620	1.811	3150	1560	0.27
SER 205-16	1 1/8	2.0472	1 3/8	3/4	33/64	55/64	0.197	1/4-28	13/64	1.339	3/32	0.042	2.280	0.620	1.811	3150	1560	0.27
SER 206	30	62	38.1	22.2	15.9	22.2	5	M6X1	5.6	40.5	3.18	1.65	67.7	15.93	54.3	2000	1020	0.38
SER 206-17	1 1/4	2.4409	1 1/2	7/8	5/8	7/8	0.197	1/4-28	7/32	1.594	1/8	0.065	2.665	0.628	2.138	4410	2250	0.39
SER 206-18	1 1/4	2.4409	1 1/2	7/8	5/8	7/8	0.197	1/4-28	7/32	1.594	1/8	0.065	2.665	0.628	2.138	4410	2250	0.39
SER 206-19	1 1/4	2.4409	1 1/2	7/8	5/8	7/8	0.197	1/4-28	7/32	1.594	1/8	0.065	2.665	0.628	2.138	4410	2250	0.39
SER 207	35	72	42.9	23.8	17.5	25.4	6	M8X1.0	6.4	48	3.18	1.65	78.6	18.32	63.5	2640	1400	0.56
SER 207-20	1 1/4	2.8346	1 1/2	15/16	1 1/16	1	0.236	5/8-24	1/32	1.890	1/8	0.065	3.095	0.721	2.500	5820	3090	0.57
SER 207-21	1 1/4	2.8346	1 1/2	15/16	1 1/16	1	0.236	5/8-24	1/32	1.890	1/8	0.065	3.095	0.721	2.500	5820	3090	0.57
SER 207-22	1 1/4	2.8346	1 1/2	15/16	1 1/16	1	0.236	5/8-24	1/32	1.890	1/8	0.065	3.095	0.721	2.500	5820	3090	0.57
SER 207-23	1 1/4	2.8346	1 1/2	15/16	1 1/16	1	0.236	5/8-24	1/32	1.890	1/8	0.065	3.095	0.721	2.500	5820	3090	0.57
SER 208	40	80	49.2	27.8	19	30.2	8	M8X1.0	6.4	53	3.18	1.65	86.6	21.1	69.3	2990	1600	0.87
SER 208-24	1 1/2	3.1496	1 5/8	1 3/32	3/4	1 3/16	0.315	5/8-24	1/4	2.087	1/8	0.065	3.410	0.831	2.728	6590	3530	0.87
SER 208-25	1 1/2	3.1496	1 5/8	1 3/32	3/4	1 3/16	0.315	5/8-24	1/4	2.087	1/8	0.065	3.410	0.831	2.728	6590	3530	0.87
SER 209	45	85	49.2	27.8	19	30.2	8	M8X1.0	6.4	57.3	3.18	1.65	91.6	21.1	74.3	3350	1810	0.95
SER 209-26	1 5/8	3.3465	1 5/8	1 3/32	3/4	1 3/16	0.315	5/8-24	1/4	2.256	1/8	0.065	3.606	0.831	2.925	7390	3990	0.94
SER 209-27	1 5/8	3.3465	1 5/8	1 3/32	3/4	1 3/16	0.315	5/8-24	1/4	2.256	1/8	0.065	3.606	0.831	2.925	7390	3990	0.94
SER 209-28	1 5/8	3.3465	1 5/8	1 3/32	3/4	1 3/16	0.315	5/8-24	1/4	2.256	1/8	0.065	3.606	0.831	2.925	7390	3990	0.94
SER 210	50	90	51.6	28.6	19	32.6	9	M10X1.25	7.5	63	3.18	2.41	96.5	23.84	79.7	3600	2010	1.03
SER 210-30	1 7/8	3.5433	2 1/32	1 1/8	3/4	1 9/32	0.354	3/8-24	19/64	2.480	1/8	0.095	3.799	0.939	3.138	7940	4430	1.00
SER 210-31	1 7/8	3.5433	2 1/32	1 1/8	3/4	1 9/32	0.354	3/8-24	19/64	2.480	1/8	0.095	3.799	0.939	3.138	7940	4430	1.00
SER 211	55	100	55.6	28.6	22.2	33.4	9	M10X1.25	7.5	70	3.18	2.41	106.5	23.84	90.7	4400	2550	1.21
SER 211-32	2	3.9370	2 3/16	1 3/16	7/8	1 5/16	0.354	3/8-24	19/64	2.756	1/8	0.095	4.183	0.939	3.571	9700	5620	1.20
SER 211-34	2 1/8	3.9370	2 3/16	1 3/16	7/8	1 5/16	0.354	3/8-24	19/64	2.756	1/8	0.095	4.183	0.939	3.571	9700	5620	1.20
SER 211-35	2 1/8	3.9370	2 3/16	1 3/16	7/8	1 5/16	0.354	3/8-24	19/64	2.756	1/8	0.095	4.183	0.939	3.571	9700	5620	1.20
SER 212	60	110	65.1	31.8	25.4	33.4	10	M10X1.25	7.5	77	3.18	2.41	116.6	29.4	100	5350	3150	1.68
SER 212-36	2 1/4	4.3307	2 9/16	1 1/4	1	1 9/16	0.394	3/8-24	19/64	3.031	1/8	0.095	4.591	1.158	3.937	11800	6940	1.70
SER 212-38	2 3/8	4.3307	2 9/16	1 1/4	1	1 9/16	0.394	3/8-24	19/64	3.031	1/8	0.095	4.591	1.158	3.937	11800	6940	1.70
SER 212-39	2 3/8	4.3307	2 9/16	1 1/4	1	1 9/16	0.394	3/8-24	19/64	3.031	1/8	0.095	4.591	1.158	3.937	11800	6940	1.72

Agricultural Bearings

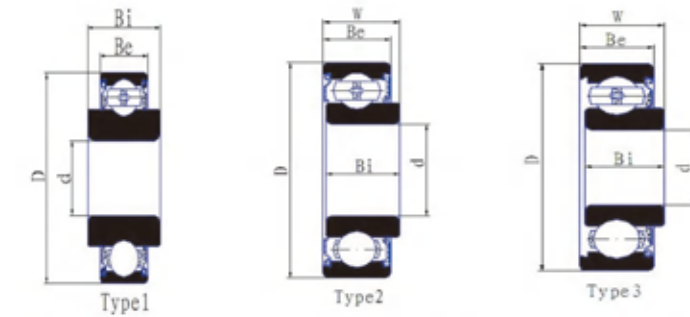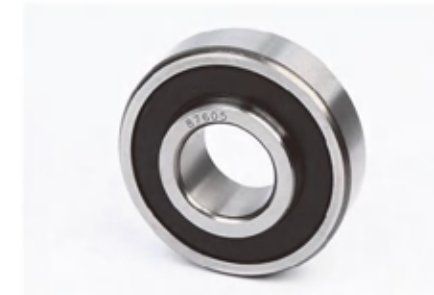


Bearing No.	Type	d	D	W	Be	Bi	Load Rating KN	
		Bore	Outer Dia.	Width	OD.Width	ID.Width	Cr	Cor
88016	1	16	35		11	14.4	7.64	3.72
87603	2	17	47	16	14	15	10.45	6.56
88503	1	17	40		12	16.601	9.57	4.79
87503	2	17	40		12	14.288	9.57	4.79
87504	2	20	47		14	15.875	12.84	6.65
88504	1	20	47		14	17.75	12.84	6.65
87604	2	20	52	19	15	18	12.26	7.81
88505	1	25	52		15	16.75	14.02	7.88
88026	1	26	52		15	16.75	14.02	7.88
87505	2	25	52	15.875	15	15.24	14.02	7.88
8605	3	25	62		17	21	17.22	11.39
87605	2	25	62		17	21	17.22	11.39
88506	1	30	62		16	24	19.46	11.31
87506	2	30	62	20	16	19	19.46	11.31
88506	1	30	62		16	24	19.46	11.31
88107	1	35	72		17	25	25.67	15.3
8507	3	35	72	21	17	20	25.67	15.3
87507	2	35	72	21	17	25	25.67	15.3
87607	2	35	80		21	25	33.5	19.1
88507	1	35	72		17	25	25.67	15.3
88128	1	38.892	80		21	24	29.52	18.14
88508	1	40	80		21	27	29.52	18.14
87508	2	40	80		21	24	29.52	18.14
87608	2	40	90		23	27	40.5	24
88509	1	45	85		21	27	31.67	20.68
88510	1	50	90		22	30	35.07	23.18
88511	1	55	100		23	31	43.38	29.22
88512	1	60	110		25	33	47.76	32.93

Agricultural Bearings

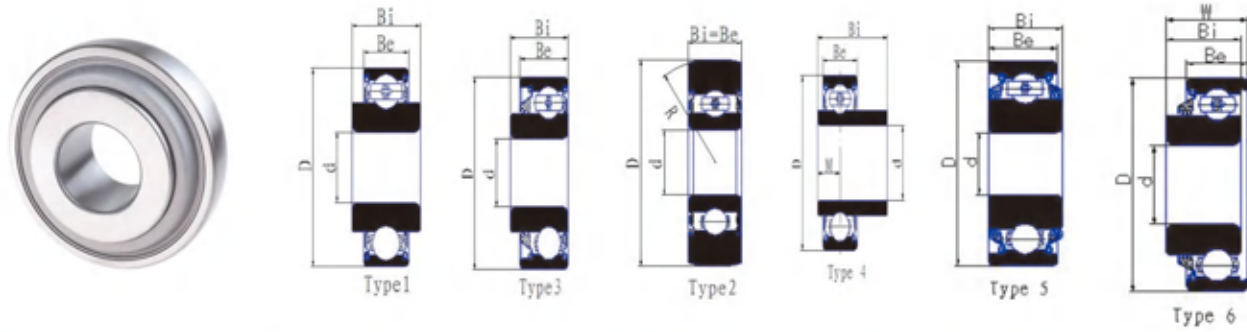


Bearing No.	Type	d	D	Be	Bi	M	Load Rating KN	
		Bore	Outer Dia.	OD.Width	ID.Width		Cr	Cor
202NPP9	2	12.7	38.1	11	11		7.64	3.72
202KRR7	2	12.7	38.1	14.4	14.4		7.64	3.72
202NPP-22	1	14.986	40	12.827	13.716		7.64	3.72
202RRE	4	15	35	11	22.35	7.2	7.64	3.72
203JD	3	17	40	12	14		9.57	4.79
203KRR2	1	16.256	40	12	18.288		9.57	4.79
203KRR3	2	15.951	50.8	15	15		9.57	4.79
203KRR5	1	13.081	40	12	18.288		9.57	4.79
203KRR7	1	17	40	12	16.612		9.57	4.79
203NPP9	1	15.9	40	12.954	12.954		9.57	4.79
203FFA	1	19.05	44.45	12.7	12.7		9.38	5.03
DG1747ARSL	3	17	47	19	27		12.87	6.65
204RY2	3	16	45.225	15.49	18.67		12.84	6.65
204PY3	3	16	45.225	15.49	18.67		12.84	6.65
204RR8	1	16	45.225	15.49	15.49		12.84	6.65
Z9504RST	1	19.05	45.225	15.49	15.49		12.84	6.65
204KRR14	1	16	47	15	18.288		12.84	6.65
Z9504AB	1	19.05	45.225	15.49	15.49		12.84	6.65
Z9504B	1	19.05	45.225	15.49	15.49		12.84	6.65
204KRR	1	20	47	14	17.7		12.84	6.65
205KRR	1	25	52	15	21		14.02	7.88
205KRRB6	1	13.081	52	15	34.925		14.02	7.88
205DDS (205GP)	5	16	53	18.2	19.4		14.02	7.88
AA205DDS 7/8"	5	22.225	53	18.2	19.4		14.02	7.88
205DDS 3/4"	5	19.05	53	18.2	19.4		14.02	7.88
205KR3	6	19.05	52	17.78	16.26		14.02	7.88
205KP6	6	19.2	52	23.39	24.32		14.02	7.88
205KP8	6	19.05	52	15	18.288		14.02	7.88
205RVA	3	19.2	52	15	21.03		14.02	7.88
W206KRR18	1	28.575	62	16	31.8		19.46	11.31
207KRR3	1	35	72	17	25		25.67	15.3
207KRR14	1	31.814	72	17	25		25.67	15.3
208KRR2	1	40	80	21	24		29.52	18.14
88128	1	38.892	80	21	27.5		29.52	18.14
88131	1	38.9	82.6	21.6	26		29.52	18.14

Agricultural Bearings

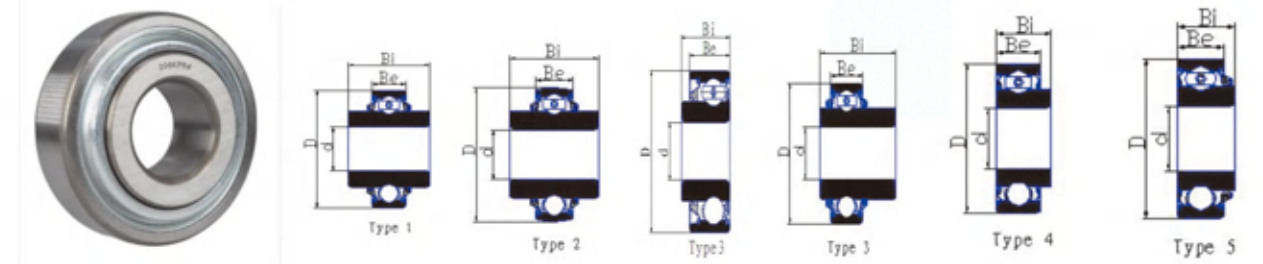


Bearing No.	Type	d	D	Be	Bi	Load Rating KN	
		Bore	Outer Dia.	OD.Width	ID.Width	Cr	Cor
204KRD4	4	16	47	14	17.5	12.84	6.65
205PP10	1	16	52	15	34.925	14.02	7.88
205PPB7	2	23.813	52	15	34.925	14.02	7.88
G205PPB7	2	23.813	52	15	34.925	14.02	7.88
205PP9	1	19.2	52	15	34.925	14.02	7.88
205NPP9	1	19.2	52	15	34.925	14.02	7.88
205PP12	3	16.129	52	15	38.1	14.02	7.88
205RRAN	4	19.202	52	15	21.107	14.02	7.88
205RVA	3	19.2	52	15	21.03	14.02	7.88
206KPR4	5	24.638	62	18	22.225	19.46	11.31
206KRD4	5	25	62	18	22.225	19.46	11.31
206GGH	1	19.2	62	16	24	19.46	11.31
206KRR18	1	32	62	16	24	19.46	11.31
206KRRB	1	19.2	62	16	24	19.46	11.31
206KRR14	1	31.773	62	16	24	19.46	11.31
206KRRB3	1	28.575	62	16	24	19.46	11.31

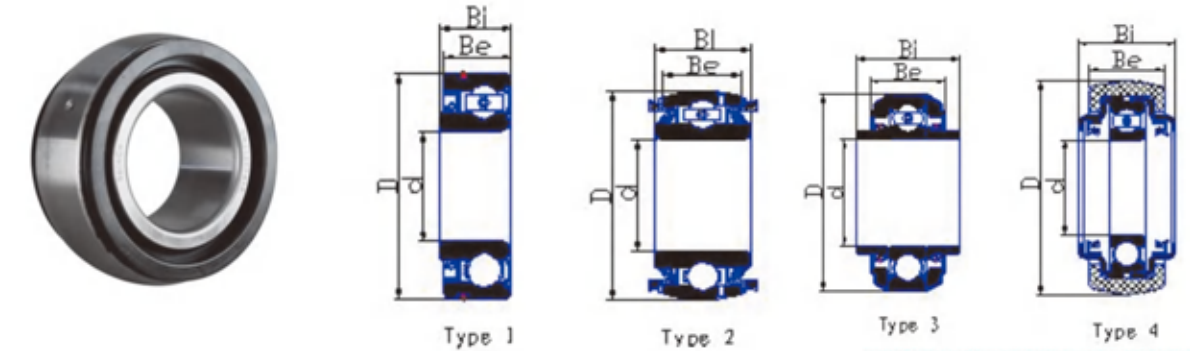


Bearing No.	Type	d	D	Be	Bi	Load Rating KN	
		Bore	Outer Dia.	OD.Width	ID.Width	Cr	Cor
RW 507 ER	1	35	72	22.5	23.5	25.67	15.3
RW 509 FR	1	41.275	83	25.745	26		
1-AA28184	2	45	85	30	36.5	31.67	20.68
AA28186	2	55.575	100	33.325	39.675	43.38	29.22
WLT6211	3	55	102	41	56	43.38	29.22
BRST211	4	55	125	43.35	57	43.38	29.22

Agricultural Bearings

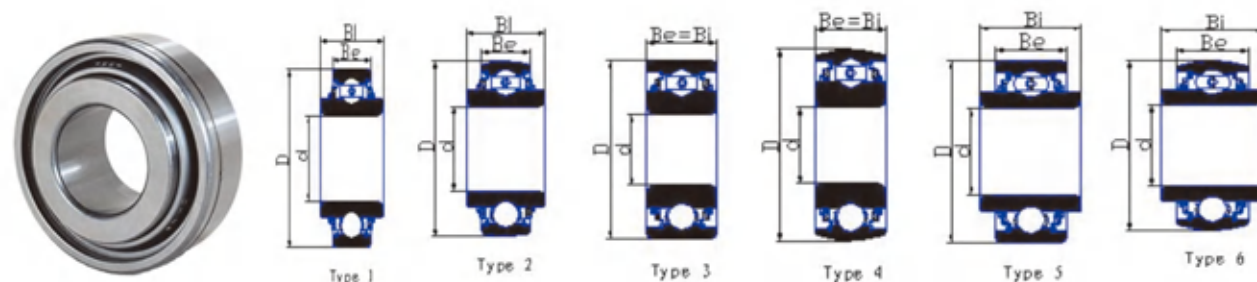


Bearing No.	Type	d	D	Be	Bi	Load Rating KN	
		Bore	Outer Dia.	OD.Width	ID.Width	Cr	Cor
W208PP10	1	38.113	80	21	42.875	29.52	18.14
W208PPB2	2	38.113	80	18	42.875	29.52	18.14
W208PPB4	4	30.175	80	30.175	30.175	29.52	18.14
W208PPB7	2	30.175	80	18	30.175	29.52	18.14
W208PPB10	2	38.113	80	21	42.875	29.52	18.14
W208PPB23	6	38.113	80	30.175	42.875	29.52	18.14
TCS25-24	5	38.1	80	30.18	36.53	29.52	18.14
DNF 140 1 1/4 GY	2	31.763	80	21	30.18	29.52	18.14
W209PPB2	4	45	85	30.175	30.175	31.67	20.68
W209PPB4	4	39	85	30.175	30.175	31.67	20.68
W209PPB11	1	45	85	22	36.525	31.67	20.68
WIR210-31	1	49.225	90	20	49.2	35.07	23.18
RM1115K	1	49.225	90	20	49.2	35.07	23.18
W210PP2	3	49.225	90	30.175	30.175	35.07	23.18
W210PP8	3	38.862	90	30.175	30.175	35.07	23.18
W210PPB9	2	19.225	90	23	36.525	35.07	23.18
W210PPB2	4	49.225	90	30.175	30.175	35.07	23.18
W210PPB5	4	45.339	90	30.175	30.175	35.07	23.18
AGRIC0211	2	55.575	100	25	33.325	43.38	29.22
W211PP2	3	55.575	100	33.325	33.325	43.38	29.22
W211PPB2	4	55.575	100	33.325	33.325	43.38	29.22
W211PPB4	6	55.575	100	33.325	55.55	43.38	29.22
W211PPB8	2	55.575	100	25	33.325	43.38	29.22
WIR211-33	1	52.388	100	21	55.563	43.38	29.22
WTR212-39	1	61.912	110	22	61.912	47.76	32.93
W214PP2	3	70	125	39.675	39.675	60.83	45.03
W214PPB2	4	70	125	39.675	39.675	60.83	45.03
W214PPB9	2	70.256	125	29	44.45	60.83	45.03

Agricultural Bearings

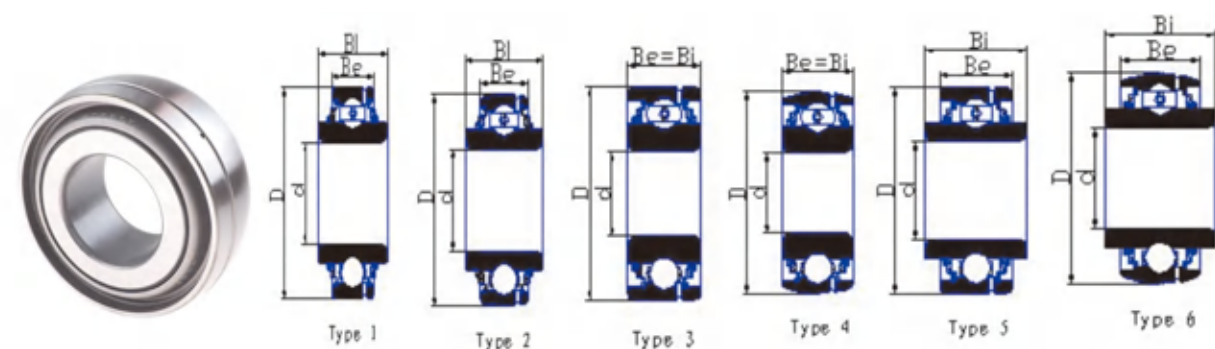


Bearing No.	Type	d	D	Be	Bi	Load Rating KN	
		Bore	Outer Dia.	OD.Width	ID.Width	Cr	Cor
RCJ 40	2	40	80	21	42.9	29.52	18.14
GW209PPB2	4	45	85	30.175	30.175	31.67	20.68
GW209PPB4	4	39	85	30.175	30.175	31.67	20.68
GW209PPB11	2	45	85	22	36.525	34.67	20.68
TCF45	2	50	85	22	38.4	34.67	20.68
GW210PPB2	4	49.225	90	30.175	30.175	35.07	23.18
GW210PPB5	4	45.339	90	30.175	30.175	35.07	23.18
GW210PP9	1	49.225	90	23	36.525	35.07	23.18
TCF50	2	50	90	23	38.4	35.07	23.18
GW211PP2	3	55.575	100	33.325	33.325	43.38	29.22
GW211PPB2	4	55.575	100	33.325	33.325	43.38	29.22
GW211PP4	5	55.575	100	33.325	55.5	43.38	29.22
GW211PPB4	6	55.575	100	33.325	55.5	43.38	29.22
GW211PP8	1	55.575	100	25	33.325	43.38	29.22
GW211PPB8	2	55.575	100	25	33.325	43.38	29.22
GW211PPB9	2	55.575	100	25	39.675	43.38	29.22
GW211PPB10	4	49.225	100	33.325	33.325	43.38	29.22
GW211PPB13	2	45.339	100	25	33.325	43.38	29.22
GW211PPB14	2	51.181	100	25	33.325	43.38	29.22
GW211PPB20	6	55.563	100	33.325	39.675	43.38	29.22
GW211PPB25	6	45.212	100	33.325	44.45	43.38	29.22
DC212TTR2	1	44.45	110	27	50.8	47.76	32.93
GW214PP2	3	70	125	39.675	39.675	60.83	45.03
GW214PPB2	4	70	125	39.675	39.675	60.83	45.03
GW214PP2-E	5	70.18	125	39.675	50.8	60.83	45.03
GW214PPB3	4	49.213	125	39.675	39.675	60.83	45.03
GW214PPB5	6	70	125	39.675	61.925	60.83	45.03
GW214PPB6	2	68.278	125	28	68.263	60.83	45.03

Agricultural Bearings

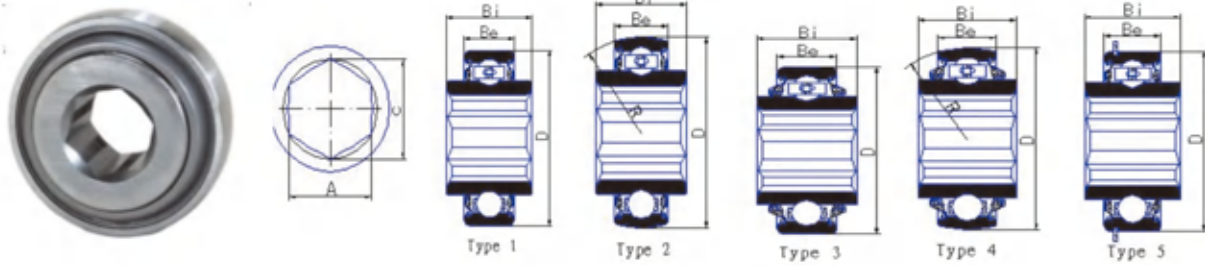


Bearing No.	Type	A	C	D	Be	Bi	Load Rating KN
		Bore		Outer Dia.	OD.Width	ID.Width	Cr
204KRR2	1	17.65	20.24	47	14	20.96	12.84
204KRRB2	2	17.65	20.24	47	14	20.96	12.84
204KPP2	3	17.65	20.24	47	14	20.96	12.84
204KPPB2	4	17.65	20.24	47	14	20.96	12.84
204KRR2-NR	5	17.65	20.24	47	14	20.96	12.84
204KRRB AH01	1	17	19.59	47	14	17.7	12.84
88120A	1	17.65	20.24	47	13.98	20.8	12.84
CS205-14H	1	22.25	25.7	52	15	17	14.02
205KRR2	1	22.25	25.7	52	15	25.4	14.02
205KRRB2	2	22.25	25.7	52	15	25.4	14.02
205KPP2	3	22.25	25.7	52	15	25.4	14.02
205KPPB2	4	22.25	25.7	52	15	25.4	14.02
205KRR2-NR	5	22.25	25.7	52	15	25.4	14.02
205KRR2-NR-667	5	22.25	25.7	52	15	16.942	14.02
205PPB13	4	22.25	25.7	52	15	25.4	14.02
205KRR AH02	2	22.25	25.7	52	15	18.7	14.02
AA22098	1	22.25	25.7	52	16	22.8	14.02
AA22098	2	22.25	25.7	52	16	22.8	14.02
206KRR6	1	25.43	29.26	62	16	24	19.46
206KRRB6	2	25.43	29.26	62	16	24	19.46
206KPP6	3	25.43	29.26	62	16	24	19.46
206KPPB6	4	25.43	29.26	62	16	24	19.46
206KPPB3	4	25.43	29.26	62	16	24	19.46
207KRRB17	2	31.775	36.65	72	17	25	25.67
207KRR17	1	31.775	36.65	72	17	25	25.67
207KPPB9	2	28.6	32.97	72	17	37.69	25.67
207KRRB12	2	28.6	32.97	72	17	25	25.67
207KPP3	3	31.775	36.65	72	17	37.7	25.67
207KPPB3	4	31.775	36.65	72	17	37.7	25.67
207KPPB3-AH05	4	36.9	32	72	17	38	25.67
W208PP16	4	31.775	36.65	80	21	36.525	29.52
W208PPB16	3	31.775	36.65	80	21	36.525	29.52
W208PP21	4	31.775	36.65	80	18	36.525	29.52
W208PPB21	3	31.775	36.65	80	18	36.525	29.52
209KRRB2	2	38.125	43.942	85	19	30	31.67

Agricultural Bearings

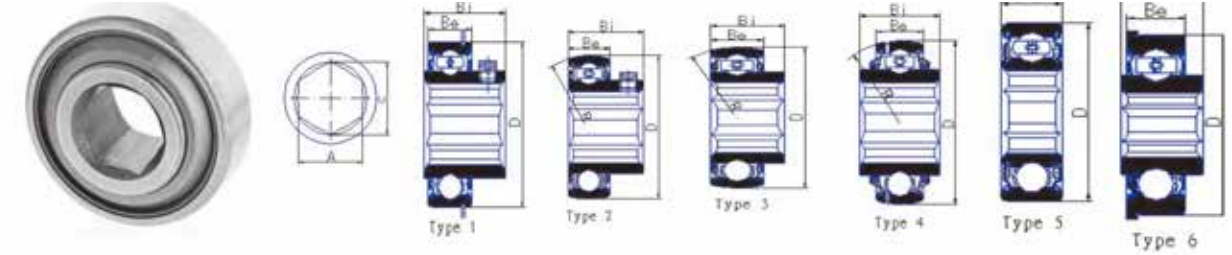


Bearing No.	Type	A	C	D	Be	Bi	Load Rating KN
		Bore		Outer Dia.	OD.Width	ID.Width	Cr
202KRR3	5	14.3	16.459	35	11	11	5.88
7436	5	16	18.43	41.275	12.7	12.7	9.57
SB204-XAG	2	18	20	47	14	25	12.84
205KRR2-SS1/4-NR	1	22.25	25.7	52	15	27.94	14.02
205KRR2-SSM6-NR	1	22.25	25.7	52	15	27.94	14.02
SB205-7/8	2	22.25	25.7	52	15	27	14.02
EXP-2312	2	22.25	25.7	52	15	27	14.02
RX84	6	17.65	20.24	57.1	15	21.4	14.02
SA205-7/8	3	22.25	25.7	52	15	21.4	14.02
1499876	5	22.25	25.7	55	13	13	10.18
G206KPPB4	4	25.4	29.26	62	18	24	19.46
G207KPPB2	4	28.6	32.97	72	19	37.69	25.67
G208PPB16	4	31.775	36.65	80	21	36.525	29.52
GW208PPB22	4	31.88	36.83	80	21	36.512	29.52
G210KPPB2-HX	4	38.125	43.942	90	22	30	35.07
6208-HEX	5	38.227	44.14	80.32	16.13	16.13	16.94
F203KRR716-HX	6	11.43	13.13	43.18	16.945	27	9.57
F205KRR1116-HX	6	17.78	20.53	57.62	17	23.88	14.02
SER207-1 HEX	1	25.43	29.26	72	24	42.9	25.67
UC211-28 HEX	2	44.475	51.308	100	25	55.6	43.38

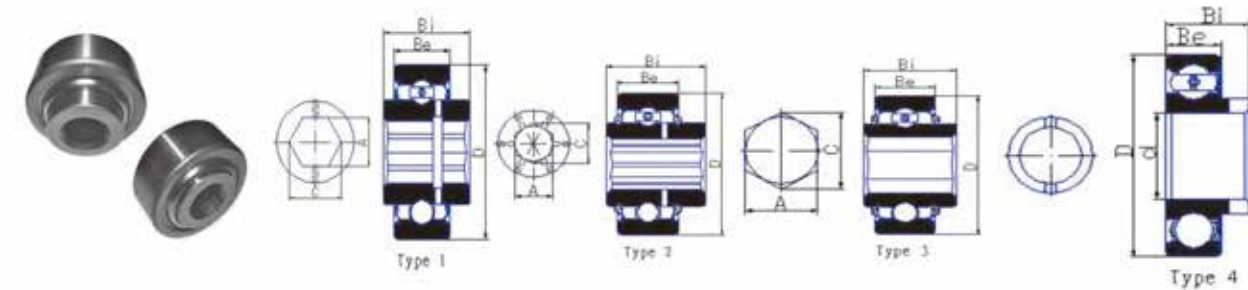


Bearing No.	Type	A	C	d	D	Be	Bi	Load Rating KN
		Bore		Bore	Outer Dia.	OD.Width	ID.Width	Cr
G207KRR28-HX-GI	1	27.56	31.7		78.05	27.864	42.951	25.67
B1150	2	17.88	20.52		57.53	23.83	38.1	14.02
B1151	1	17.88	20.52		57.53	23.83	38.1	14.02
B1160	3	27.56	31.7		78.05	27.79	42.88	25.67
B1161	1	27.56	31.7		78.05	27.79	42.88	25.67
B1210	4			30.23	62	16	34	19.46
B1220	4			35.04	80	21	35.96	33.35
B1130	4			42.87	100	25	37.69	40.66

Agricultural Bearings

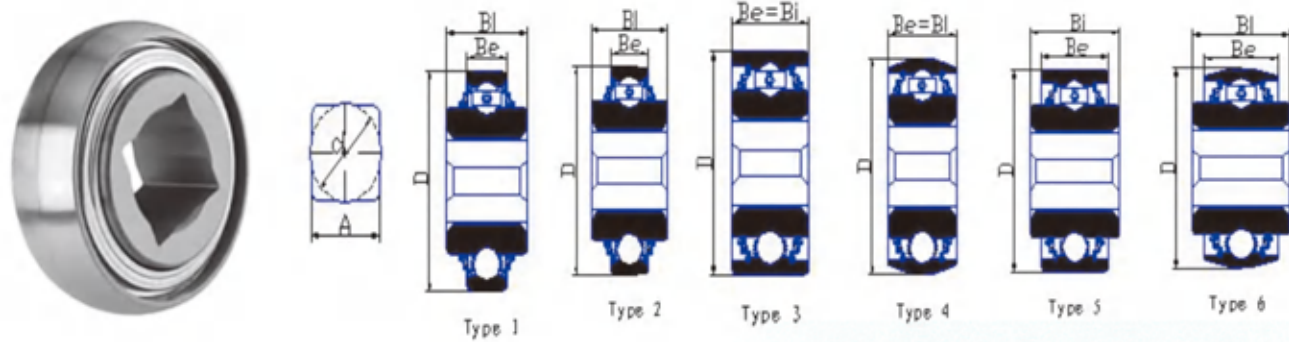


Bearing No.	Type	d	A	D	Be	Bi	Load Rating KN	
		Bore	Nominal	Outer Dia.	OD.Width	ID.Width	Cr	Cor
W208PP5	1	31.394	29.972	80	18	36.525	29.52	18.14
W208PP6	1	27.788	26.162	80	18	36.525	29.52	18.14
W208PP8	5	31.394	29.972	80	30.175	36.525	29.52	18.14
W208PPB5	2	31.394	29.972	80	18	36.525	29.52	18.14
W208PPB6	2	27.788	26.162	80	18	36.525	29.52	18.14
W208PPB8	6	31.394	29.972	80	30.175	36.525	29.52	18.14
W208PPB9	6	27.788	26.162	80	30.175	36.525	29.52	18.14
W208PPB11	6	24.441	23	85.75	30.175	36.525	29.52	18.14
W208PPB12	6	31.394	29.972	85.75	30.175	36.525	29.52	18.14
W208PPB13	2	24.441	23	80	18	36.525	29.52	18.14
DC208TT	5	31.394	29.972	80	32.487	42.863	29.52	18.14
DNF 140-8	2	27.788	26.162	80	21	30.175	29.52	18.14
VK-100-208	6	27.788	26.162	80	18	36.525	29.52	18.14
W209PP5	5	34.798	32.766	85	30.175	36.525	31.67	20.68
W209PPB5	6	34.798	32.766	85	30.175	36.525	31.67	20.68
W209PPB7	6	34.798	32.766	85.75	30.175	36.525	31.67	20.68
W209PPB8	2	34.798	32.766	85	19	36.525	31.67	20.68
W210PP4	3	31.394	29.972	90	30.175	30.175	35.17	23.18
W210PPB4	4	31.394	29.972	90	30.175	30.175	35.17	23.18
W210PPB6	6	31.394	29.972	90	30.175	36.525	35.17	23.18
W211PP3	3	41.2	38.89	100	33.324	33.324	43.38	29.22
W211PP5	5	41.2	38.89	101.6	36.52	44.45	43.38	29.22
W211PPB3	4	41.2	38.89	100	33.324	33.324	43.38	29.22
W211PPB6	6	41.2	38.89	104.78	36.52	44.45	43.38	29.22

Agricultural Bearings

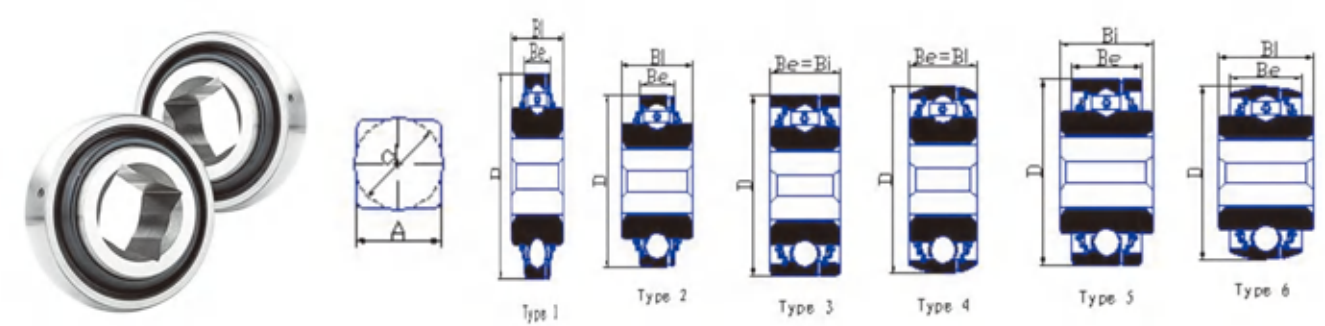


Bearing No.	Type	d	A	D	Be	Bi	Load Rating KN	
		Bore	Nominal	Outer Dia.	OD.Width	ID.Width	Cr	Cor
GW208PPB5	2	31.394	29.972	80	21	36.525	29.52	18.14
GW208PPB6	2	27.788	26.162	80	21	36.525	29.52	18.14
GW208PPB8	6	31.394	29.972	80	30.175	36.52	29.52	18.14
GW208PP17	5	31.394	29.972	85.738	30.175	36.525	29.52	18.14
GW208PPB17	6	31.394	29.972	85.738	30.175	36.525	29.52	18.14
GW209PPB5	6	34.798	32.776	85	30.175	36.525	31.67	20.68
GW209PP8	1	34.798	32.776	85	22	36.525	31.67	20.68
GW209PPB8	2	34.798	32.776	85	22	36.525	31.67	20.68
GW210PP4	3	31.394	29.972	90	30.175	30.175	35.17	23.18
GW210PPB4	4	31.394	29.972	90	30.175	30.175	35.17	23.18
GW210PPB6	6	31.394	29.972	90	30.175	36.525	35.17	23.18
GW211PP3	3	41.2	38.89	100	33.325	33.325	43.38	29.22
GW211PPB3	4	41.2	38.89	100	33.325	33.325	43.38	29.22
GW211PP5	5	41.2	38.89	101.6	36.525	44.45	43.38	29.22
GW211PP17	5	41.2	38.89	100	33.325	44.45	43.38	29.22
GW211PPB17	6	41.2	38.89	100	33.325	44.45	43.38	29.22
DS211TTR20	4	41.2	38.89	100	36.525	50.8	43.38	29.22
DC212TTR2	2	48.05	45.524	110	27	50.8	47.76	32.93
GW211PPB4	4	54.889	52.2	125	39.675	39.675	43.38	29.22
GW216PP2	1	68.2	58.8	140	30	63.5	55.04	45.09
GW216PPB2	2	68.2	58.5	140	30	63.5	55.04	45.09

Agricultural Bearings

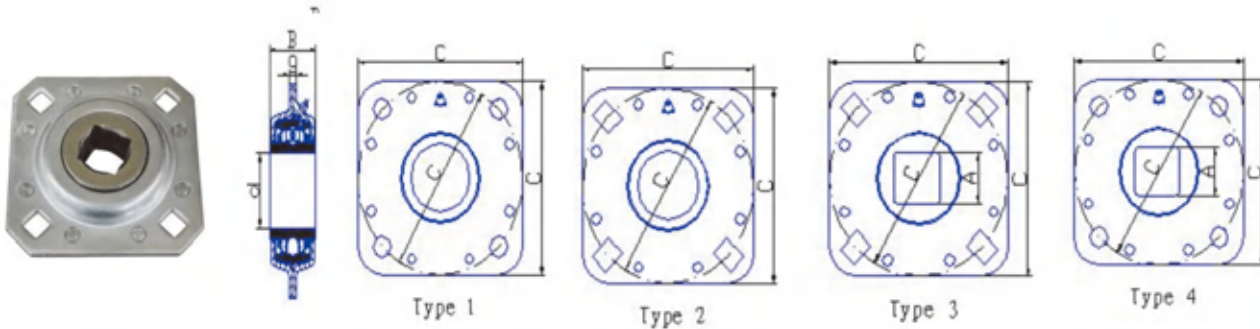

Bearing No.	Type	d Bore	A Nominal	B ID.Width	g	C	Load Rating KN	
							Cr	Cor
ST208-1N	3		26.162	38.176	7	121	29.52	18.14
ST208-1 1/8	3		29.972	38.176	7	121	29.52	18.14
ST491A	1	45		42.8	7	127	31.67	20.68
ST491B	2	38.86		42.8	7	127	31.67	20.68
FD209-1 1/4SQ	3		32.766	42.8	7	127	31.67	20.68
FD209-1 1/8SQ	3		29.972	42.8	7	127	31.67	20.68
644400 KNT	4		39.25	55.6	8	139.7	43.38	29.22
FD211-1 1/2SQ	3		38.89	50.8	8	139.7	43.38	29.22
FD211-1 3/4HEX			44.475	55.575	8	139.7	43.38	29.22
FD211-1 3/4RD	1	45.212		55.6	8	139.7	43.38	29.22
FD211-1 15/16RD	1	49.225		55.6	8	139.7	43.38	29.22
FD211-1 15/16RDC		49.225		67.5	8	139.7	43.38	29.22
FD211-2 3/16RD	1	55.575		55.6	8	139.7	43.38	29.22
FD211REA	1	44.45		55.6	8	139.7	43.38	29.22
DHU 211-1 3/4HEX			44.475	53.975	8	139.7	43.38	29.22
DHU 40S-211	4		40.878	50.8	8	139.7	43.38	29.22


Plummer Blocks

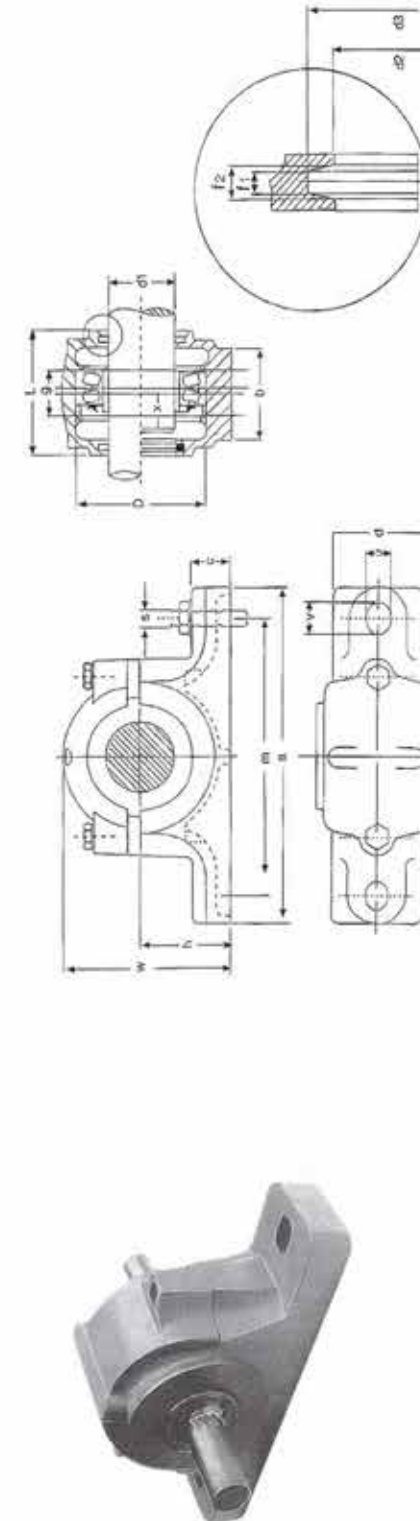

SN500 Series


Housing No	shaft mm	Dimensions(mm)														Weight (kg)	Bearing No.	Adapter Sleeve	Locating Ring		
		D _{H8}	a	b	c	f _{H12}	h _{H12}	L	W	m	s	u	v	x	d _{H12}				d _{H12}	U _{H12}	Number
SN505	20 3/4	52	165	46	22	25	40	67	75	130	M12	15	20	22	21.5	31	3	4.2	1.4	H205 SR52x5	2
SN506	25 1	62	185	52	22	30	50	77	90	150	M12	15	20	22	26.5	38	4	5.4	1.9	H305 SR62x7	2
SN507	30 1 1/4	72	185	52	22	33	50	82	95	150	M12	15	20	24	31.5	43	4	5.4	2.0	H206 SR62x10	1
SN508	35 1 1/4	80	205	60	25	33	60	85	110	170	M12	15	20	26	36.5	48	4	5.4	3.2	H207 SR72x8	1
SN509	40 1 1/2	85	205	60	25	31	60	85	112	170	M12	15	20	28	41.5	53	4	5.4	3.0	H208 SR72x10	1
SN510	45 1 3/4	90	205	60	25	33	60	90	115	170	M12	15	20	28	46.5	58	4	5.4	3.4	H209 SR80x7.5	1
SN511	50 2	100	255	70	28	33	70	95	130	210	M16	18	23	30	51.5	67	5	6.9	4.6	H210 SR80x10	1
SN512	55 2 1/4	110	255	70	30	38	70	105	135	210	M16	18	23	32	56.5	72	5	6.9	5.0	H211 SR100x8	1
SN513	60 2 1/4	120	275	80	30	43	80	110	150	230	M16	18	23	36	62.0	77	5	6.8	6.8	H212 SR110x8	2
SN515	65 2 1/2	130	280	80	30	41	80	115	155	230	M16	18	23	38	67.0	82	5	6.8	7.4	H213 SR120x10	2
SN516	70 2 1/2	140	315	90	32	43	95	120	175	260	M20	22	27	40	72.0	89	6	8.1	9.5	H215 SR130x8	2
SN517	75 3	150	320	90	32	46	95	125	185	260	M20	22	27	42	77.0	94	6	8.1	10.0	H216 SR140x8.5	1
SN518	80 3 1/4	160	345	100	35	62.4	100	145	195	290	M20	22	27	50	82.0	99	6	8.1	12.8	H217 SR150x9	2
SN519	85 —	170	345	100	35	53	112	140	210	290	M20	22	27	52	87.0	104	6	8.1	15.4	H218 SR160x10.5	2
SN520	90 3 1/2	180	380	110	40	70.3	112	160	218	320	M24	26	32	54	92.0	111	7	9.3	17.8	H219 SR170x10	1
SN522	100 4	200	410	120	45	80	125	175	240	350	M24	26	32	60	102.0	125	8	10.8	19.0	H220 SR180x12	2
SN524	110 4 1/4	215	410	120	45	86	140	185	270	350	M24	26	32	64	113.0	135	8	10.7	26.0	H222 SR200x13.5	2
SN526	115 4 1/2	230	445	130	50	90	150	190	290	380	M24	28	36	64	118.0	140	8	10.7	32.0	H224 SR215x14	1
SN528	125 5	250	500	150	50	98	150	205	305	420	M30	33	42	70	128.0	154	9	12.2	40.0	H226 SR230x13	2
SN530	135 5 1/4	270	530	160	60	106	160	220	325	50	M30	33	42	76	138.0	164	9	12.2	47.2	H228 SR250x15	2
SN532	140 5 1/2	290	550	160	60	114	170	235	345	470	M30	33	42	80	143.0	173	10	13.7	56.5	H230 SR270x16.5	1
																				H232 SR290x17	2
																				H233 SR290x10	1

Plummer Blocks

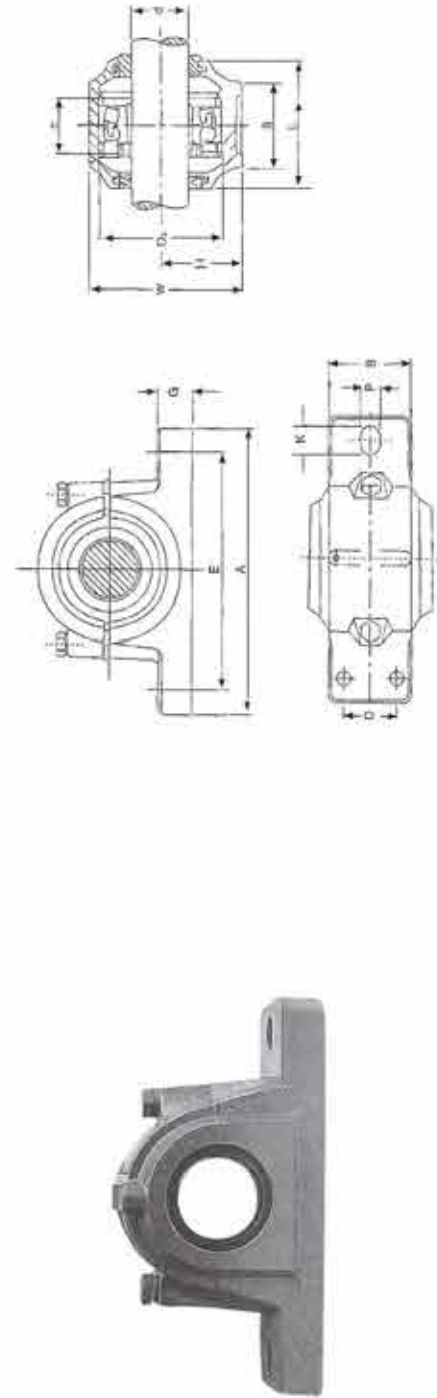

SNU500 Series

Housing No	shaft	FltH	Dimensions(mm)													Weight (kg)	Bearing No	Adapter Sleeve	Locating Ring Symbol	QTY
			A	E	B	P	K	G	W	L	D	C	D1H	Bolt Size (2)	(4)					
SNU505	20	40	165	130	46	13	20	19	71	67		25	52	M10		1.9	1205K	H205	SR6245	2
SNU506	25	50	185	150	52	13	22	22	87	72		32	62	M10		2.2	1206K	H206	SR6245	2
SNU507	30	50	185	150	52	13	20	22	92	82		34	72	M10		2.4	1207K	H207	SR7245	2
SNU508	35	60	205	170	60	15	20	25	106	85		39	80	M12		3.2	1208K	H208	SR8045	2
SNU509	40	60	205	170	60	15	20	25	109	85		30	85	M12		3.5	1209K	H209	SR8545	2
SNU510	45	60	205	170	60	15	20	25	112	90		41	90	M12		3.85	1210K	H210	SR9045	2
SNU511	50	70	255	210	70	18	23	28	127	95	35	44	100	M16	M12	5.2	1211K	H211	SR10045	2
SNU512	55	70	255	210	70	18	23	30	133	105	35	48	110	M16	M12	6.7	1212K	H212	SR11045	2
SNU513	60	80	275	230	80	18	24	30	148	110	35	51	120	M16	M12	7.9	1213K	H213	SR12045	2
SNU515	65	80	280	230	80	18	26	30	154	115	40	56	130	M16	M12	7.7	1215K	H215	SR13045	2
SNU516	70	95	315	260	90	22	27	32	175	120	40	58	140	M20	M12	11.0	1216K	H216	SR14045	2
SNU517	75	95	320	260	90	22	30	32	181	125	50	61	150	M20	M12	12.7	1217K	H217	SR15045	2
SNU518	80	100	345	290	100	22	27	35	192	140	50	65	160	M20	M16	14.8	1218K	H218	SR16045	2
SNU519	85	112	345	290	100	22	27	35	209	145	50	68	170	M20	M16	15.5	1219K	H219	SR17045	2
SNU520	90	112	380	320	110	26	32	40	215	160	60	70	180	M24	M16	18.4	1220K	H220	SR18045	2
SNU522	100	125	410	350	120	26	32	45	239	175	70	80	200	M24	M16	24.8	1222K	H222	SR20045	2
SNU524	110	140	410	350	120	26	32	45	271	185	70	86	215	M24	M16	32.2	1224K	H224	SR21045	2
SNU526	115	150	445	380	130	28	35	50	290	190	70	90	230	M24	M20	39.8	1226K	H226	SR23045	2
SNU528	125	150	500	420	150	35	42	50	302	205	80	98	250	M30	M24	48.8	1228K	H228	SR25045	2
SNU530	135	160	530	450	160	35	42	60	323	220	90	106	270	M30	M24	56.5	1230K	H230	SR27045	2
SNU532	140	170	550	470	160	35	42	60	344	235	90	114	290	M30	M24	63.5	1232K	H232	SR29045	2

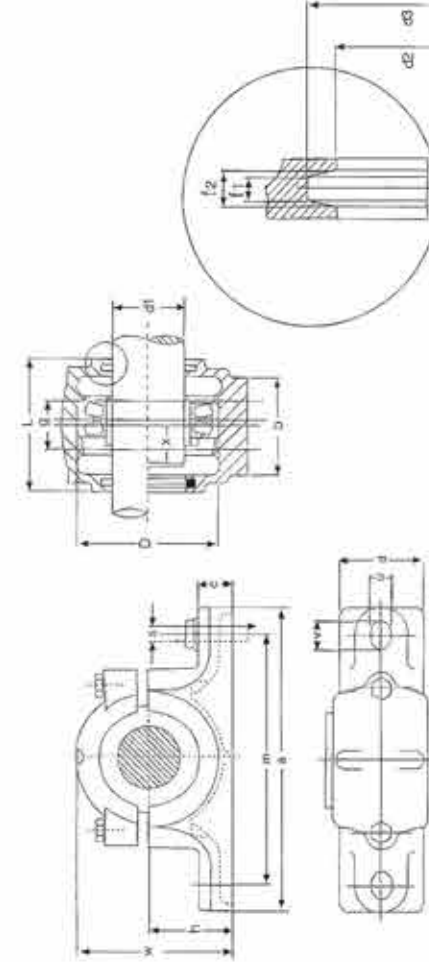


Plummer Blocks

SN600 Series

Housing No	shaft mm	Dimensions(mm)																							Weight (kg)
		D ₁	a	b	c	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	
SN605	20	40	165	130	46	13	20	19	71	67		25	52	M10											2.1
SN606	25	50	185	150	52	13	22	22	87	72		32	62	M10											2.8
SN607	30	50	185	150	52	13	20	22	92	82		34	72	M10											3.5
SN608	35	60	205	170	60	15	20	25	106	85		39	80	M12											4.2
SN609	40	60	205	170	60	15	20	25	109	85		30	85	M12											5.0
SN610	45	60	205	170	60	15	20	25	112	90		41	90	M12											6.1
SN611	50	70	255	210	70	18	23	28	127	95	35	44	100	M16	M12										6.5
SN612	55	70	255	210	70	18	23	30	133	105	35	48	110	M16	M12										7.9
SN613	60	80	275	230	80	18	24	30	148	110	35	51	120	M16	M12										10.8
SN615	65	80	280	230	80	18	26	30	154	115	40	56	130	M16	M12										14.6
SN616	70	95	315	260	90	22	27	32	175	120	40	58	140	M20	M12										17.1
SN617	75	95	320	260	90	22	30	32	181	125	50	61	150	M20	M12										18.7
SN618	80	100	345	290	100	22	27	35	192	140	50	65	160	M20	M16										24.1
SN619	85	112	345	290	100	22	27	35	209	145	50	68	170	M20	M16										25.5
SN620	90	112	380	320	110	26	32	40	215	160	60	70	180	M24	M16										31
SN622	100	125	410	350	120	26	32	45	239	175	70	80	200	M24	M16										41.4
SN624	110	140	410	350	120	26	32	45	271	185	70	86	215	M24	M16										54.6
SN626	115	150	445	380	130	28	35	50	290	190	70	90	230	M24	M20										67.2
SN628	125	150	500	420	150	35	42	50	302	205	80	98	250	M30	M24										92.6
SN630	135	160	530	450	160	35	42	60	323	220	90	106	270	M30	M24										101.5
SN632	140	170	550	470	160	35	42	60	344	235	90	114	290	M30	M24										122.3


Plummer Blocks

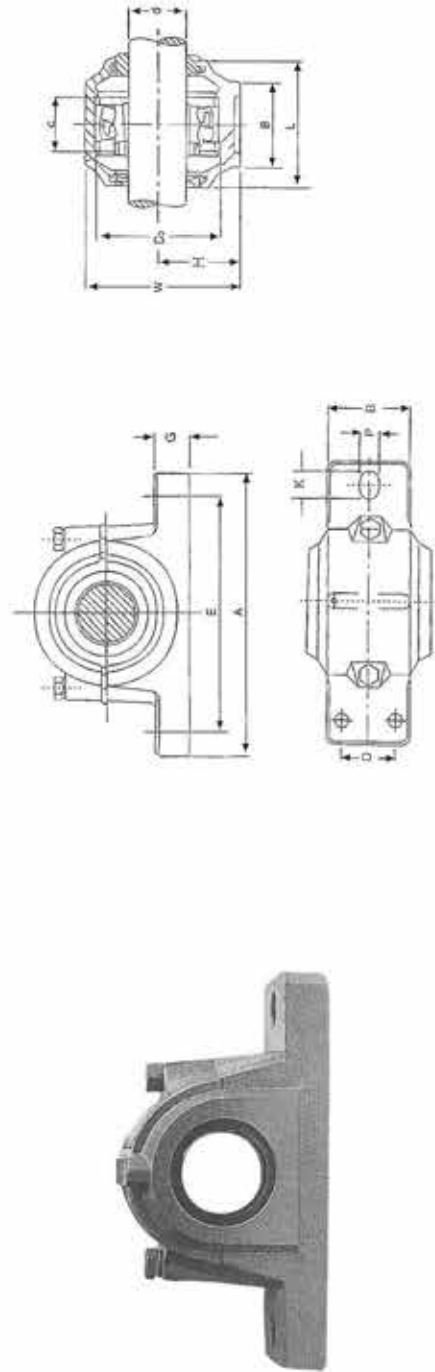

SNU600 Series

Housing No	Shaft	Dimensions(mm)											Bolt Size		Weight (kg)	Bearing No	Adapter Sleeve	Locating Ring		
		Hb12	DrH6	A	E	B	P	C	L	W	G	K	D	(2)				(4)	Number	QTY
SNU605	20	40	62	185	150	52	13	32	77	87	22	20		M10		2.2	H305 2305K	H305 H2305K	SR62x75 H2305K	2 1
SNU606	25	50	72	185	150	52	13	32	82	92	22	20		M10		2.4	H306 H2306K	H306 H2306K	SR72x7.5 H2306K	2 1
SNU607	30	60	80	205	170	60	15	39	85	106	25	22		M12		3.2	H307 H2307K	H307 H2307K	SR80x9 H2307K	2 1
SNU608	35	60	90	205	170	60	15	41	90	112	25	22		M12		3.85	H308 H2308K	H308 H2308K	SR90x9 H2308K	2 1
SNU609	40	70	100	255	210	70	18	44	95	127	28	24	35	M16	M12	5.2	H309 H2309K	H309 H2309K	SR100x9.5 H2309K	2 1
SNU610	45	70	110	255	210	70	18	48	105	133	30	24	35	M16	M12	6.7	H310 H2310K	H310 H2310K	SR110x10.5 H2310K	2 1
SNU611	50	80	120	275	230	80	18	51	110	148	30	24	35	M16	M12	7.9	H311 H2311K	H311 H2311K	SR120x11 H2311K	2 1
SNU612	55	80	130	280	230	80	18	56	115	154	30	26	40	M16	M12	7.7	H312 H2312K	H312 H2312K	SR130x12.5 H2312K	2 1
SNU613	60	95	140	315	260	90	22	58	120	175	32	30	40	M20	M12	11.0	H313 H2313K	H313 H2313K	SR140x12.5 H2313K	2 1
SNU615	65	100	160	345	290	100	22	65	140	192	35	30	50	M20	M16	14.8	H315 H2315K	H315 H2315K	SR160x14 H2315K	2 1
SNU616	70	112	170	345	290	100	22	68	145	209	35	30	50	M20	M16	15.5	H316 H2316K	H316 H2316K	SR170x14.5 H2316K	2 1
SNU617	75	112	180	380	320	110	25	70	160	215	40	32	60	M24	M16	18.4	H317 H2317K	H317 H2317K	SR180x14.5 H2317K	2 1
SNU619	85	125	200	410	350	120	25	80	175	239	45	32	70	M24	M16	24.8	H319 H2319K	H319 H2319K	SR200x13 H2319K	2 1


Adapter Sleeves

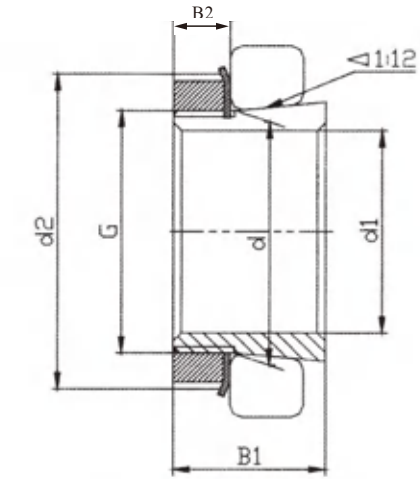

H200 Series


Adapter Sleeve	Shaft d _i				Dimensions (mm)					Weight (kg)	Accessory		
	HS in	HA in	HE in	H mm	d	d _i	B _i	B _e	G		Sleeve	Locknut	Lockwasher
H204				17	20	32	24	7	M20 X 1	0.041	A204	KM4	MB04
H205	7/8	13/16	3/4	20	25	38	26	8	M25 X 1.5	0.070	A205	KM5	MB05
H206	7/8	15/16	1	25	30	45	27	8	M30 X 1.5	0.100	A206	KM6	MB06
H207	1-1/8	1-3/16	1-1/4	30	35	52	29	9	M35 X 1.5	0.130	A207	KM7	MB07
H208	1-3/8	1-5/16	1-1/4	35	40	58	31	10	M40 X 1.5	0.170	A208	KM8	MB08
H209	1-5/8	1-7/16	1-1/2	40	45	65	33	11	M45 X 1.5	0.230	A209	KM9	MB09
H210	1-5/8	1-11/16	1-3/4	45	50	70	35	12	M50 X 1.5	0.270	A210	KM10	MB10
H211	1-7/8	1-15/16	2	50	55	75	37	12	M55 X 2	0.310	A211	KM11	MB11
H212	2-1/8	2-1/16	2-1/4	55	60	80	38	13	M60 X 2	0.350	A212	KM12	MB12
H213	2-3/8	2-3/16	2-1/4	60	65	85	40	14	M65 X 2	0.400	A213	KM13	MB13
H214				60	70	92	41	14	M70 X 2	0.600	A214	KM14	MB14
H215	2-5/8	2-7/16	2-1/2	65	75	98	43	15	M75 X 2	0.710	A215	KM15	MB15
H216	2-7/8	2-11/16	2-3/4	70	80	105	46	17	M80 X 2	0.880	A216	KM16	MB16
H217		2-15/16	3	75	85	110	50	18	M85 X 2	1.020	A217	KM17	MB17
H218	3-1/8	3-3/16	3-1/4	80	90	120	52	18	M90 X 2	1.200	A218	KM18	MB18
H219		3-5/16	3-1/4	85	95	125	55	19	M95 X 2	1.350	A219	KM19	MB19
H220		3-7/16	3-1/2	90	100	130	58	20	M100 X 2	1.500	A220	KM20	MB20
H221				95	105	140	60	20	M105 X 2	1.700	A221	KM21	MB21
H222		3-15/16	4	100	110	145	63	21	M110 X 2	1.900	A222	KM22	MB22
H304				17	20	32	28	7	M20 X 1	0.045	A304	KM4	MB04
H305	7/8	13/16	3/4	20	25	38	29	8	M25 X 1.5	0.075	A305	KM5	MB05
H306	7/8	15/16	1	25	30	45	31	8	M30 X 1.5	0.110	A306	KM6	MB06
H307	1-1/8	1-3/16	1-1/4	30	35	52	35	9	M35 X 1.5	0.140	A307	KM7	MB07
H308	1-3/8	1-5/16	1-1/4	35	40	58	36	10	M40 X 1.5	0.190	A308	KM8	MB08
H309	1-5/8	1-7/16	1-1/2	40	45	65	39	11	M45 X 1.5	0.250	A309	KM9	MB09
H310	1-5/8	1-11/16	1-3/4	45	50	70	42	12	M50 X 1.5	0.300	A310	KM10	MB10
H311	1-7/8	1-15/16	2	50	55	75	45	12	M55 X 2	0.350	A311	KM11	MB11
H312	2-1/8	2-1/16	2-1/4	55	60	80	47	13	M60 X 2	0.390	A312	KM12	MB12
H313	2-3/8	2-3/16	2-1/4	60	65	85	50	14	M65 X 2	0.460	A313	KM13	MB13
H314				60	70	92	52	14	M70 X 2	0.720	A314	KM14	MB14
H315	2-5/8	2-7/16	2-1/2	65	75	98	55	15	M75 X 2	0.830	A315	KM15	MB15
H316	2-7/8	2-11/16	2-3/4	70	80	105	59	17	M80 X 2	1.000	A316	KM16	MB16
H317		2-15/16	3	75	85	110	63	18	M85 X 2	1.200	A317	KM17	MB17
H318	3-1/8	3-3/16	3-1/4	80	90	120	65	18	M90 X 2	1.350	A318	KM18	MB18
H319		3-5/16	3-1/4	85	95	125	68	19	M95 X 2	1.550	A319	KM19	MB19
H320		3-7/16	3-1/2	90	100	130	71	20	M100 X 2	1.700	A320	KM20	MB20
H321				95	105	140	74	20	M105 X 2	1.950	A321	KM21	MB21
H322		3-15/16	4	100	110	145	77	21	M110 X 2	2.200	A322	KM22	MB22

Adapter Sleeves

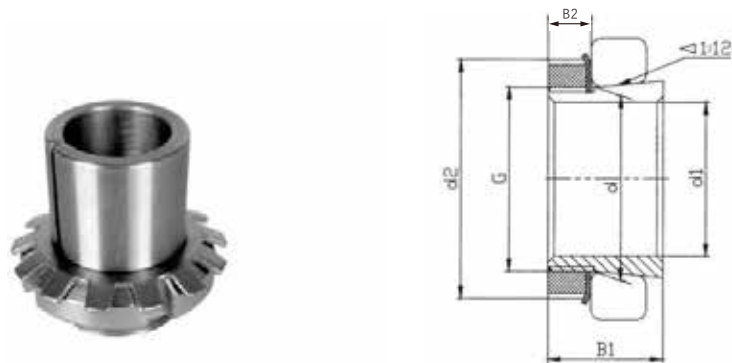

Adapter Sleeve	Shaft d1				Dimension(mm)					Weight (kg)	Accessory	
	HS in	HA in	HE in	H mm	d	d2	B1	B2	G		Lock nut	Lock washer
H2304				17	20	32	31	7	M20x1	0.049	KM4	MB4
H2305	7/8	13/16	3/4	20	25	38	35	8	M25x1.5	0.087	KM5	MB5
H2306	7/8	15/16	1	25	30	45	38	8	M30x1.5	0.126	KM6	MB6
H2307	1-1/8	1-3/16	1-1/4	30	35	52	43	9	M35x1.5	0.165	KM7	MB7
H2308	1-3/8	1-5/16	1-1/4	35	40	58	46	10	M40x1.5	0.224	KM8	MB8
H2309	1-5/8	1-7/16	1-1/2	40	45	65	50	11	M45x1.5	0.280	KM9	MB9
H2310	1-5/8	1-11/16	1-3/4	45	50	70	55	12	M50x1.5	0.362	KM10	MB10
H2311	1-7/8	1-15/16	2	50	55	75	59	12	M55x1.5	0.420	KM11	MB11
H2312	2-1/8	2-1/16	2-1/4	55	60	80	62	13	M60x2	0.480	KM12	MB12
H2313	2-3/8	2-3/16	2-1/4	60	65	85	65	14	M65x2	0.556	KM13	MB13
H2314				60	70	92	68	14	M70x2	0.897	KM14	MB14
H2315	2-5/8	2-7/16	2-1/2	65	75	98	73	15	M75x2	1.05	KM15	MB15
H2316	2-7/8	2-11/16	2-3/4	70	80	105	78	17	M80x2	1.28	KM16	MB16
H2317		2-15/16	3	75	85	110	82	18	M85x2	1.45	KM17	MB17
H2318	2-1/8	3-3/16	3-1/4	80	90	120	86	18	M90x2	1.7	KM18	MB18
H2319		3-5/16	3-1/4	85	95	125	90	19	M95x2	1.94	KM19	MB19
H2320		3-7/16	3-1/2	90	100	130	97	20	M100x2	2.15	KM20	MB20
H2321				95	105	140	101	20	M105x2	2.45	KM21	MB21
H2322		3-5/16	4	100	110	145	105	21	M110x2	2.74	KM22	MB22
H2324		4-3/16	4-1/4	110	120	155	112	22	M120x2	3.20	KM24	MB24
H2326		4-7/16	4-1/2	115	130	165	121	23	M130x2	4.60	KM26	MB26
H2328	4-13/16	4-15/16	5	125	140	180	131	24	M140x2	5.52	KM28	MB28
H2330		5-3/16	5-1/4	135	150	195	139	26	M150x2	6.60	KM30	MB30
H2332		5-7/16	5-1/2	140	160	210	147	28	M160x3	9.15	KM32	MB32
H2334		5-15/16	6	150	170	220	154	29	M170x3	10.4	KM34	MB34
H2336		6-7/16	6-1/2	160	180	230	161	30	M180x3	11.3	KM36	MB36
H2338		6-15/16	6-3/4	170	190	240	169	31	M190x3	12.6	KM38	MB38
H2340		7-3/16	7	180	200	250	176	32	M200x3	13.9	KM40	MB40
H2344				200	220	280	183	32	Tr220x4	16.6	HM44	MB44
H2348				220	240	300	196	34	Tr240x4	19.7	HM48	MB48
H2352				240	260	330	208	36	Tr260x4	24.2	HM52	MB52
H2356				260	280	350	221	38	Tr280x4	27	HM56	MB56

Adapter Sleeves

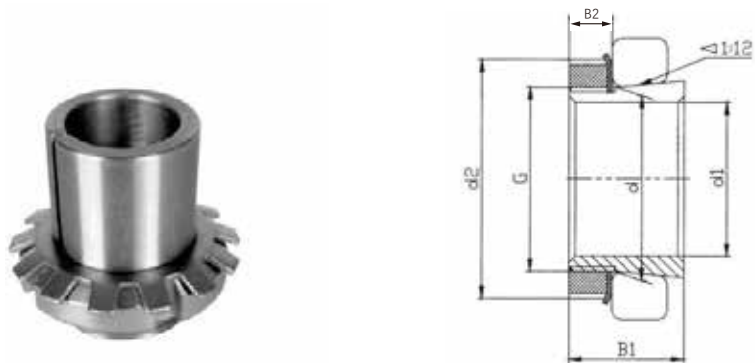

Adapter Sleeve	Shaft d1		Dimension(mm)					Weight (kg)	配套 Accessory	
	HE in	H mm	d	d2	B2	B1	G		Lock nut	Lock washer
H3024	4-1/4	110	120	145	22	72	M120X2	1.8	KML24	MBL24
H3026	4-1/2	115	130	155	23	80	M130X2	2.8	KML26	MBL26
H3028	5	125	140	165	24	82	M140X2	3.05	MBL28	MBL28
H3030	5-1/4	135	150	180	26	87	M150X2	3.75	KML30	MBL30
H3032	5-1/2	140	160	190	28	93	M160X3	5.1	KML32	MBL32
H3034	6	150	170	200	29	101	M170X3	5.8	KML34	MBL34
H3036	6-1/2	160	180	210	30	109	M180X3	6.7	KML36	MBL36
H3038	6-3/4	170	190	220	31	112	M190X3	7.25	KML38	MBL38
H3040	7	180	200	240	32	120	M200X3	6.7	KML40	MBL40
H3044		200	220	260	30	126	Tr220X4	9.9	HML44	MSL44
H3048		220	240	290	34	133	Tr240X4	12	HML48	MSL48

Adapter Sleeve	Shaft d1			Dimension(mm)					Weight (kg)	Accessory	
	HA in	HE in	H mm	d	d2	B2	B1	G		Lock nut	Lock washer
H3120	3-7/16	3-1/2	90	100	130	20	76	M100X2	1.8	KM20	MB20
H3122	3-15/16	4	100	110	145	21	81	M110X2	2.1	KM22	MB22
H3124	4-3/16	4-1/4	110	120	155	22	88	M120X2	2.5	KML24	MBL24
H3126	4-7/16	4-1/2	115	130	155	23	92	M130X2	3.45	KM26	MB26
H3128	4-15/16	5	125	140	180	24	97	M140X2	4.1	MB28	MB28
H3130	5-3/16	5-1/4	135	150	195	26	111	M150X2	5.25	KM30	MB30
H3132	5-7/16	5-1/2	140	160	210	28	119	M160X3	7.25	KM32	MB32
H3134	5-15/16	6	150	170	220	29	121	M170X3	8.1	KM34	MB34
H3136	6-7/16	6-1/2	160	180	230	30	131	M180X3	6.7	KM36	MB36
H3138	6-15/16	6-3/4	170	190	240	31	141	M190X3	10.5	KM38	MB38
H3140	7-3/16	7	180	200	250	32	150	M200X3	6.7	KM40	MB40
H3144	7-15/16		200	220	280	35	161	Tr220X4	15	HM44	MB44
H3148			220	240	300	37	172	Tr240X4	16	HM48	MB48
H3152			240	260	330	39	190	Tr260X4	21	HM52	MB52
H3156			260	280	350	41	195	Tr280X4	23	HM56	MB56
H3160			280	300	380	40	208	Tr300X4	29	HM60	MS60

Housing Series

Solid Base Housing Series



Heavy-weight Housing Series



Non-standard Housing Series



As well as the domestic market, our sales network covers the whole world, especially in Southeast Asia, Middle-east, Euro-America and Africa.

